


HF680NLC

1.02

Wuhan Guide Technology Co.,Ltd.

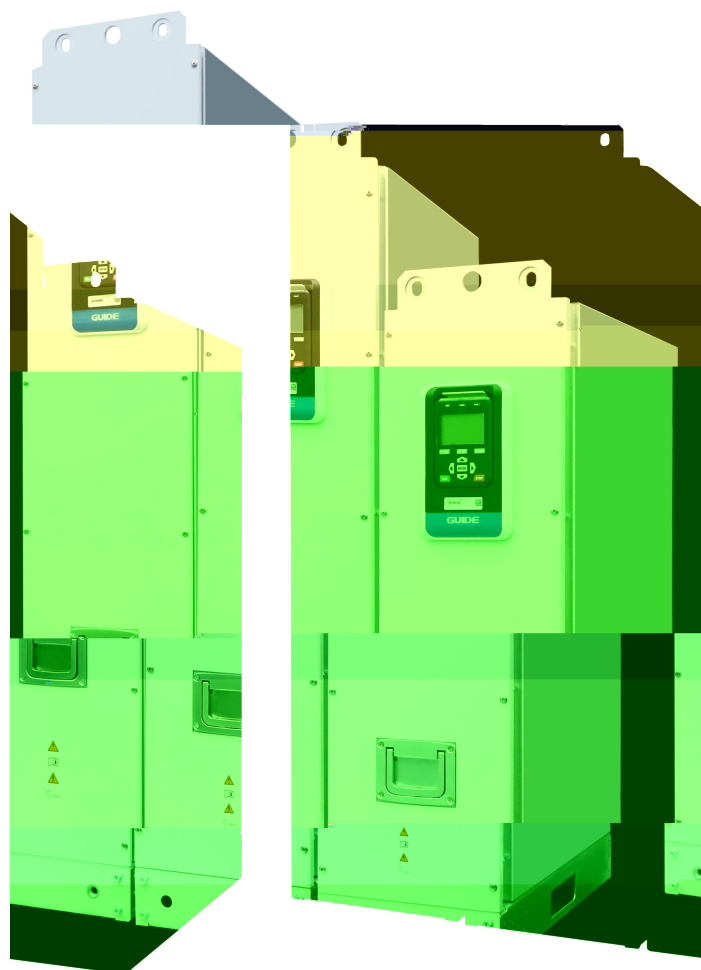

HF680NLC

HF680NLC

1.

1.1

1.2

1.3

2.

2.1

2.2

2.3

2.4

2.5

2.6

2.7

2.8

2.9

2.10

2.11

3.

3.1

3.2

3.3

3.4

3.5 DP

3.6 PG

3.7 PG

4.

4.1

4.2

4.3

4.4

4.5

4.6

4.7

4.8

4.9 EMC

5.

5.1

5.2

5.3

5.4

6.

6.1

6.2

7.

7.1

P2 m " o

7.2

P3




7.3

P4

7.7	1		P8
7.8	2		P9
7.9	3		P10
7.10	4		P11
7.11	1		P12
7.12	2		P13
7.13	3		P14
7.14	4		P15
7.15	1	V/F	P16
7.16	2	V/F	P17
7.17	3	V/F	P18
7.18	4	V/F	P19
7.19	1		P20
7.20	2		P21
7.21	3		P22
7.22	4		P23
7.23		P33	
8.			
8.1			
8.2			
8.3			
8.4			
8.5			
8.6			
8.7			
8.8			
8.9		V/F	
8.10			
8.11			
9.			
9.1			
9.2			
9.3			
10.			
10.1			
10.2			
10.3			
10.4			
10.5			

1.

1.1

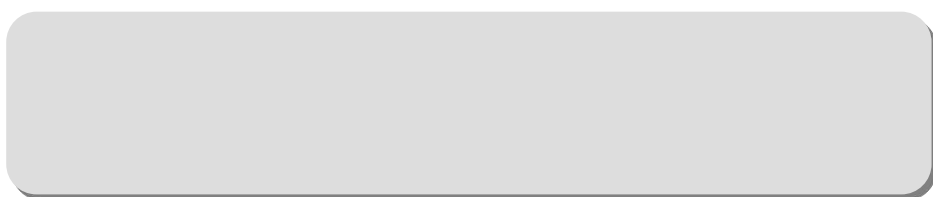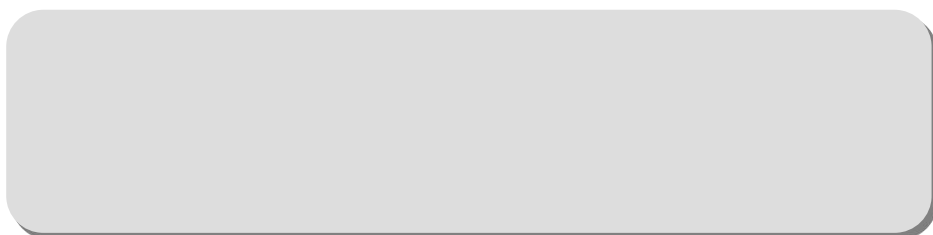



1.2

(1)

(2)

(3)

(4)

LVD	2014/35/EU	EN 61800-5-1
EMC	2014/30/EU	EN 61800-3

1.3


2.

2.1



1.
2.
3.
4.

2.2

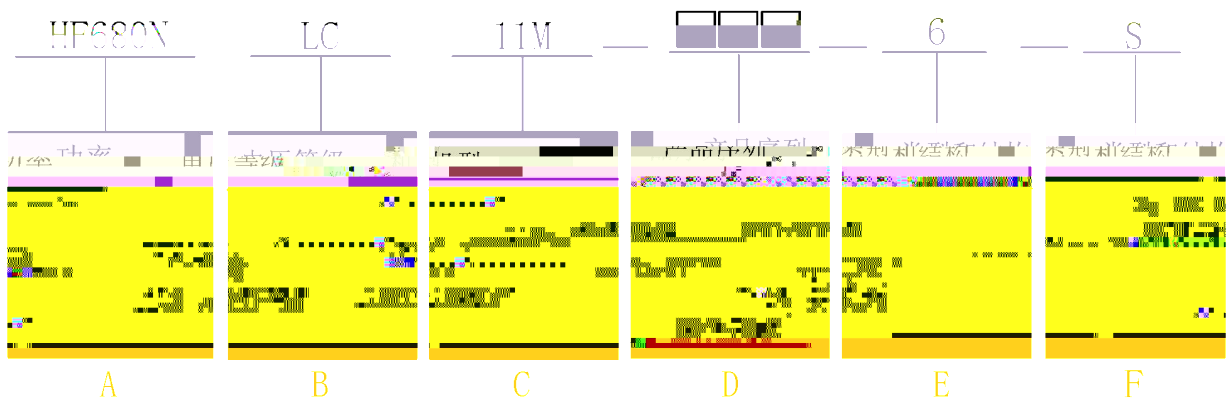

2-1

A	HF680N				
B	LC				
C	11M	11C			
D	200	200kW	1600	1600kW	
E	6	960V			
F	S:W2 W3	6	F:		



2-2

HF680NLC11M-250-6 HF680NLC 250kW

690V

AC

3PH

660V-690V 50/60Hz

0-690V 0-300Hz

2.3

2-3 HF680NLC

	[A]	[kW]	[A]	[kW]		
HF680NLC11M-200-6	220	200	180	160	W1	6
HF680NLC11M-250-6	290	250	220	200		
HF680NLC11M-280-6	320	280	290	250		
HF680NLC11M-315-6	355	315	320	280		

HF680NLC11M-355-6	390	355	355	315		
HF680NLC11M-400-6	420	400	390	355		
HF680NLC11M-450-6	472	450	420	400		
HF680NLC11M-500-6-S	545	500	472	450	W2	6
HF680NLC11M-560-6-S	610	560	545	500		
HF680NLC11M-630-6-S	675	630	610	560		
HF680NLC11M-710-6-S	760	710	675	630		
HF680NLC11M-800-6-S	810	800	760	710		
HF680NLC11M-500-6	545	500	472	450	W2	12
HF680NLC11M-560-6	610	560	545	500		
HF680NLC11M-630-6	675	630	610	560		
HF680NLC11M-710-6	760	710	675	630		
HF680NLC11M-800-6	810	800	760	710		
HF680NLC11M-900-6-S	910	900	810	800	W3	6
HF680NLC11M-1000-6-S	1025	1000	910	900		
HF680NLC11M-1120-6-S	1130	1120	1025	1000		
HF680NLC11M-1200-6-S	1280	1200	1130	1120		
HF680NLC11M-900-6	910	900	810	800	W3	12
HF680NLC11M-1000-6	1025	1000	910	900		
HF680NLC11M-1120-6	1130	1120	1025	1000		
HF680NLC11M-1200-6	1280	1200	1130	1120		
HF680NLC11C-1400-6	1520	1400	1280	1200	W2*2	12
HF680NLC11C-1600-6	1620	1600	1520	1400		


1		150%	5	1
HF680NLC11M-1200-6	HF680NLC11M-1200-6-S			110%
5	1			
2		180%	5	5
HF680NLC11M-1200-6	HF680NLC11M-1200-6-S			160%
5	5			
3	HF680NLC11M-1200-6	HF680NLC11M-1200-6-S		1.5kHz
4	HF680NLC11M-500-6	HF680NLC11M-1200-6	2	
2		12		
5	HF680NLC11M-500-6-S	HF680NLC11M-1200-6-S	2	
	1	6		
6	HF680NLC11C-1400-6	HF680NLC11C-1600-6		2
	2	12		

2.4

HF680NLC

HF680NLC11M-200-6

HF680NLC11M-450-6

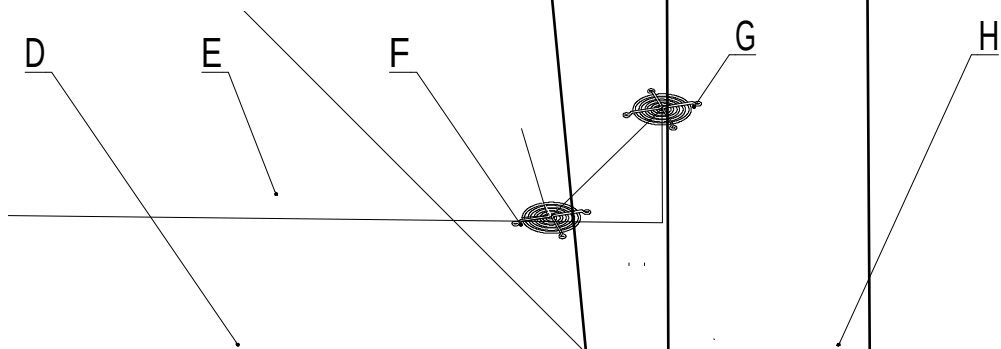

B

A

A-
E-

B-
F-

1


C-
G-

2


D-
H-

HF680NLC11M-500-6

HF680NLC11M-800-6

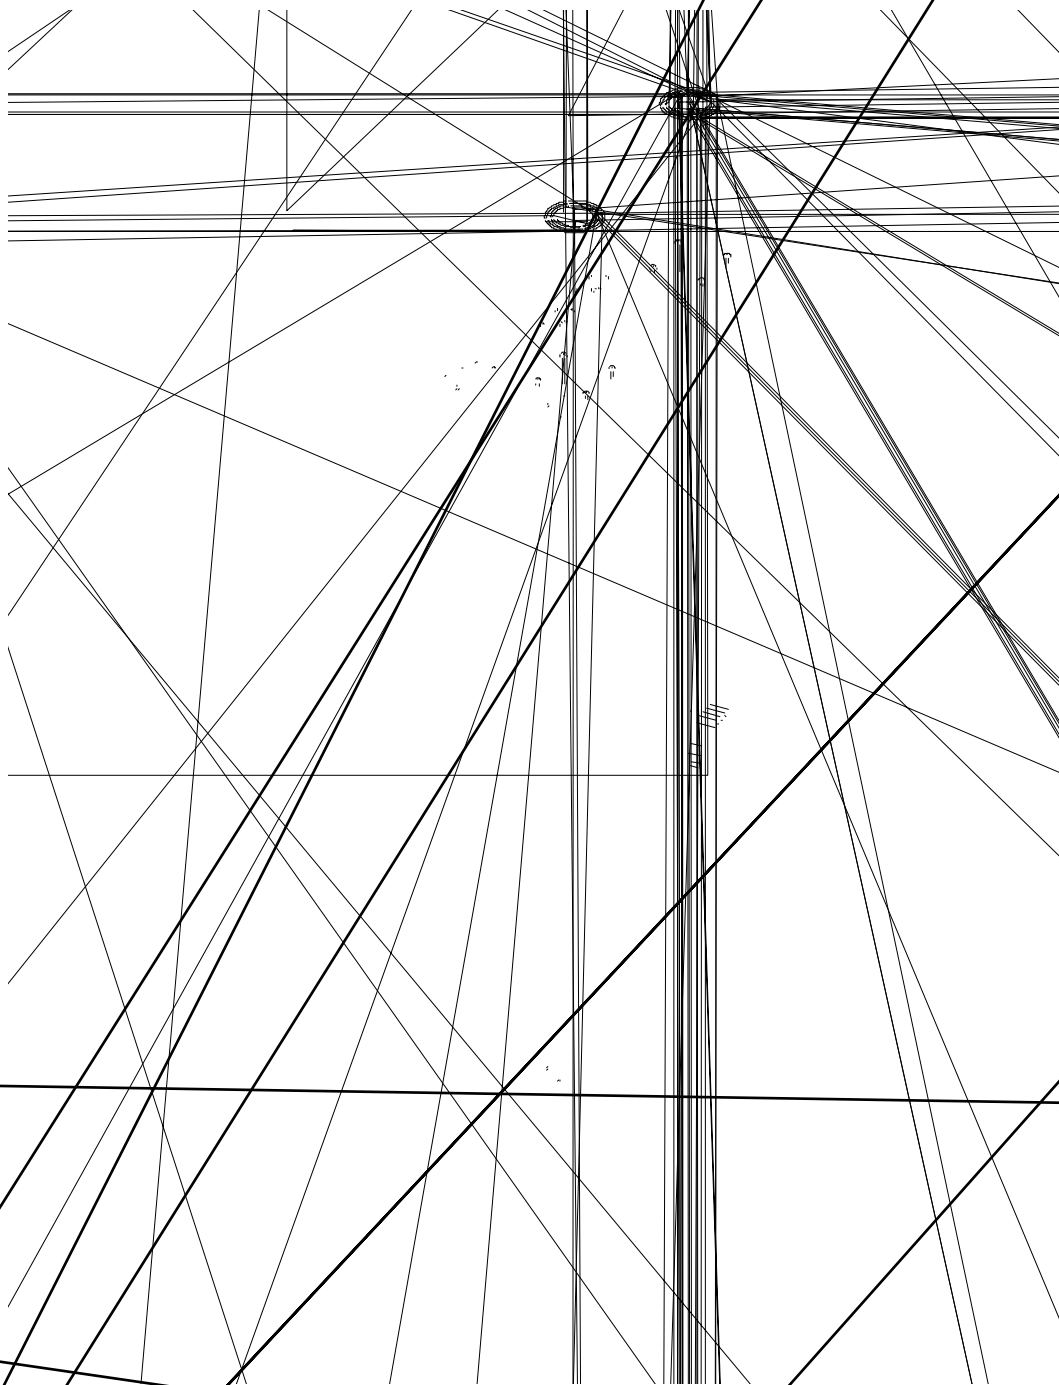

HF680NLC11M-900-6 HF680NLC11M-1200-6

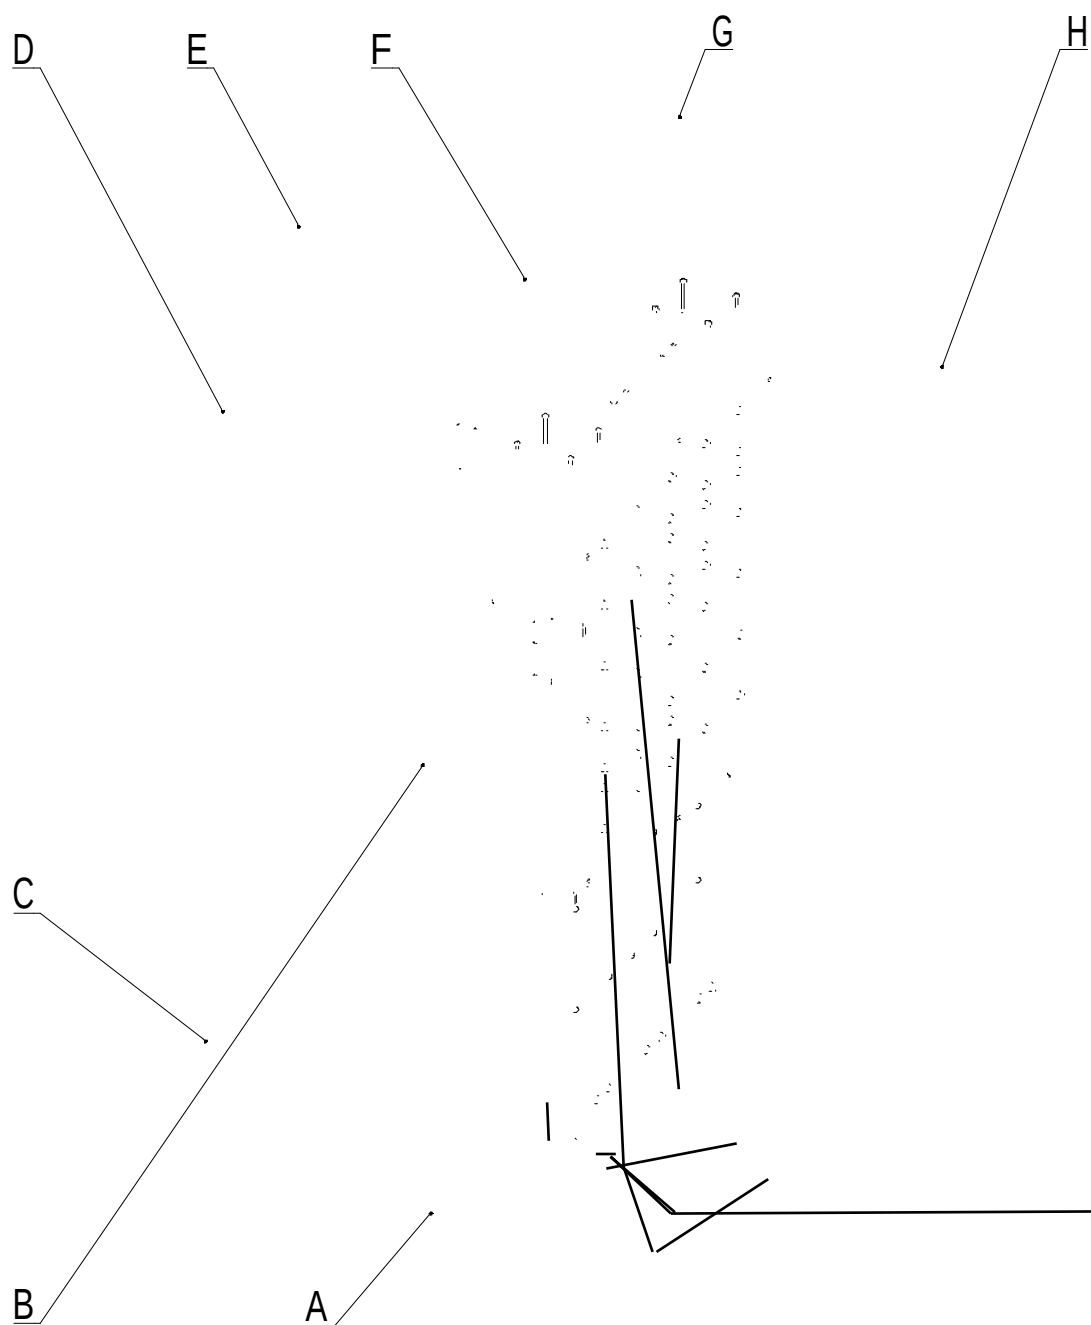

A-
E-

B-
F-


C-
1
24 °
18mm

G-
2

D-
H-

DIN2353-L
M26x1.5

2.5

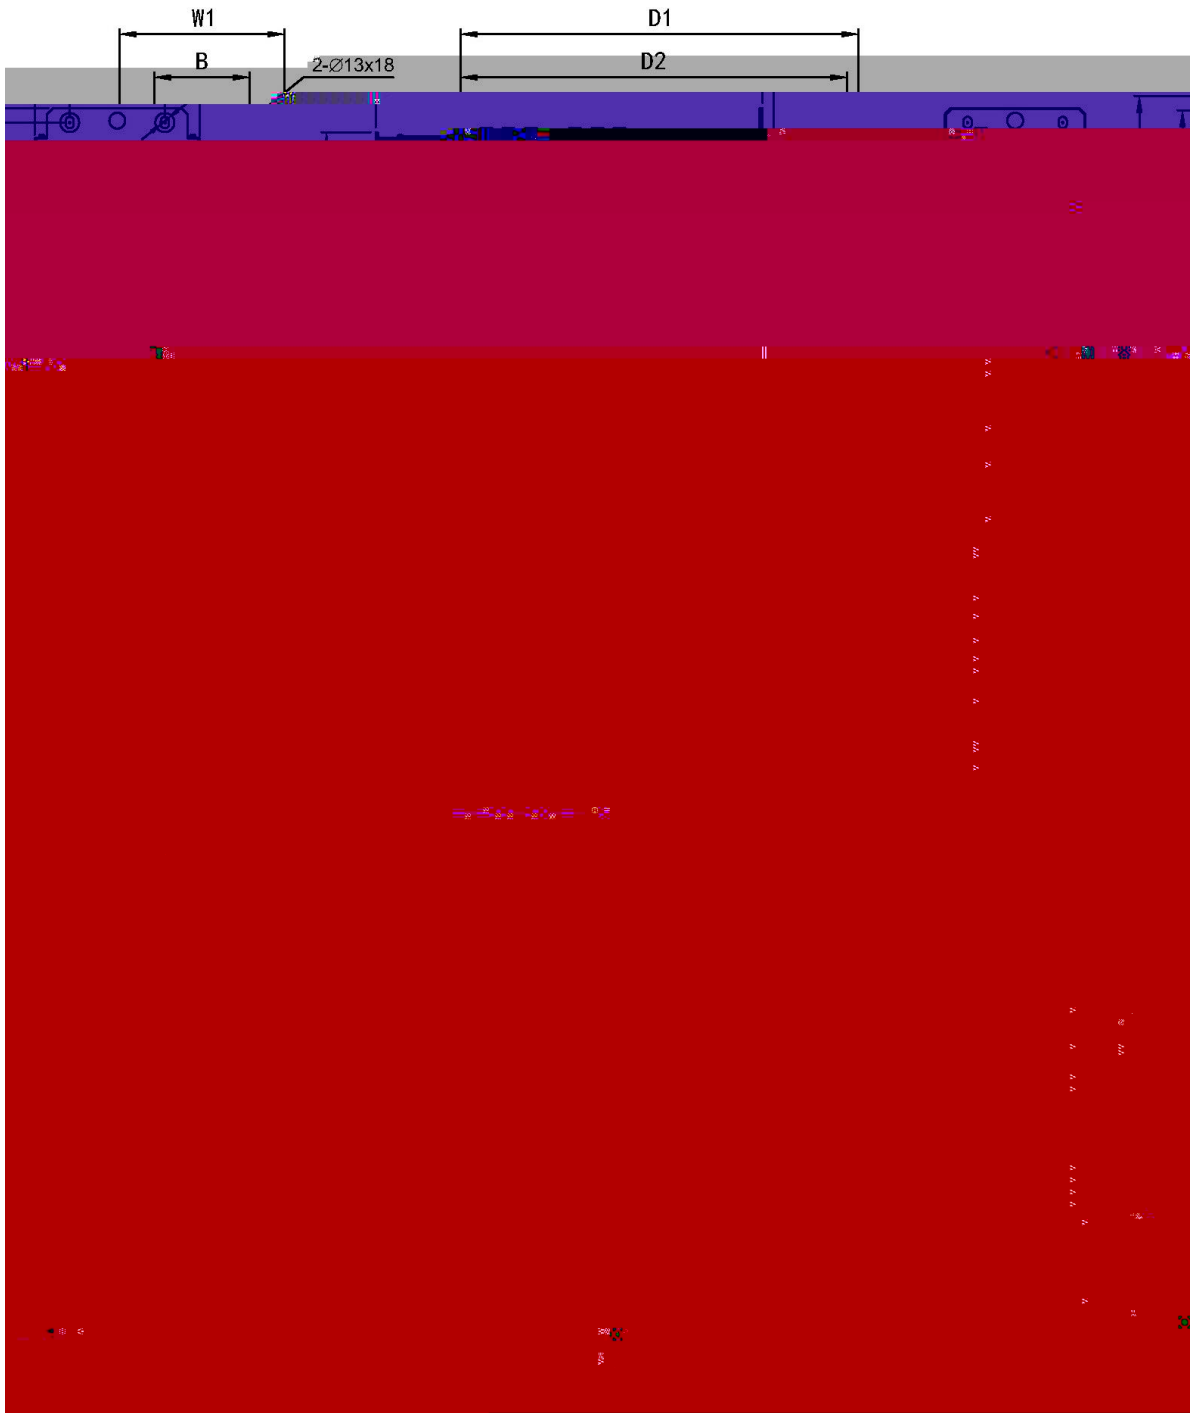

		(mm)					(mm)			8.8	kg
		H1	H2	W1	D1	D2	A	B			
W1	200	858	820	240	536	520	800	150	Φ13	M12	95
	250										
	280										
	315										
	355										
	400										
	450										
W2	500kW	1058	1020	240	536	520	1000	150	Φ13	M12	132
	560kW										
	630kW										
	710kW										
	800kW										
W3	900kW	1228	1190	260	626	610	1170	150	Φ13	M12	198
	1000kW										
	1120kW										
	1200kW										

2.6

		660V 690V
		50/60Hz
		-15% +10%
		0
		0 300Hz
		1kHz 10kHz
		0.01Hz x0.1%
		(VC) (SVC) V/F
	V/F	
		PG PG

300Hz

0Hz/200%(VC SVC) 0.8Hz/150%(V/F)

<5ms(SVC) <5ms(VC)

± 5%(SVC) ± 3%(VC)

1:500(SVC) 1:1000(VC)

± 0.02% (VC) ± 0.2% (SVC) ± 0.5% (V/F)

5 150% 1 180%


5

PID

5 2 -10V +10V
0mA/4mA 20mA
3 1 2
2 0 +10V 0mA/4mA 20mA

LCD

100
-10 0 50 60 .0
RH
-2 +60

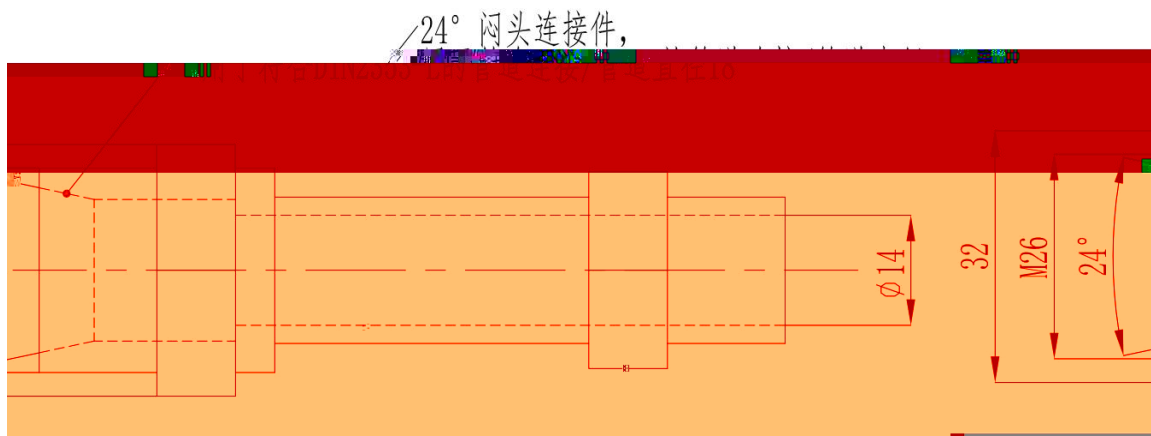

2.7

		c/a/T (kW)			c/a/T (kW)
HF680NLC11M-200-6	W1	4/0.2/4.2	HF680NLC11M-560-6 HF680NLC11M-560-6-S	W2	10.6 /0.6 /11.2
HF680NLC11M-250-6		5/0.3/5.3	HF680NLC11M-630-6 HF680NLC11M-630-6-S		12 /0.6 /12.6
HF680NLC11M-280-6		5.6/0.3/ 5.9	HF680NLC11M-710-6 HF680NLC11M-710-6-S		13.5 /0.7 /14.2
HF680NLC11M-315-6		6.3/0.3 /6.6	HF680NLC11M-800-6 HF680NLC11M-800-6-S		15.2 /0.8 /16
HF680NLC11M-355-6		7.1/0.4 /7.5	HF680NLC11M-900-6 HF680NLC11M-900-6-S	W3	17.1 /0.9 /18
HF680NLC11M-400-6		8/0.4 /8.4	HF680NLC11M-1000-6 HF680NLC11M-1000-6-S		19/1/20
HF680NLC11M-450-6		9/0.5 /9.5	HF680NLC11M-1120-6 HF680NLC11M-1120-6-S		21.3 /1.1 /22.4
HF680NLC11M-500-6 HF680NLC11M-500-6-S	W2	9.5/0.5 /10	HF680NLC11M-1200-6 HF680NLC11M-1200-6-S		22.8 /1.2 /24

C=

a=

T=

2.8

- (1)

200%
- (2)

50%

HF680NLC
- (3)

HF680NLC


2.9

	• • • • PID
	• / • / •
	• • •
	• / • /

2.10

DP	GDHF-ADPX1	GDHF-ADPX1 DP Profibus HF680NLC11M
PG	GDHF-APGX1	GDHF-APGX1 PG HF680NLC11M
PN	GDHF-APNX1	GDHF-APNX1 Profinet HF680NLC11M
STO	GDHF630N4ST001A	GDHF630N4ST001A STO HF680NLC11M
	GDHF-AKZY1	GDHF-AKZY1 HF680NLC11M
2	GDHF-KL2	GDHF-KL2 2 HF680NLC11M 2
4	GDHF-KL4	GDHF-KL4 4 HF680NLC11M 4
	GDHF680N4FB01A1	GDHF680N4FB01A1 HF680NLC11M
	GDHF680N4FB02A1	GDHF680N4FB02A1 HF680NLC11M

2.11

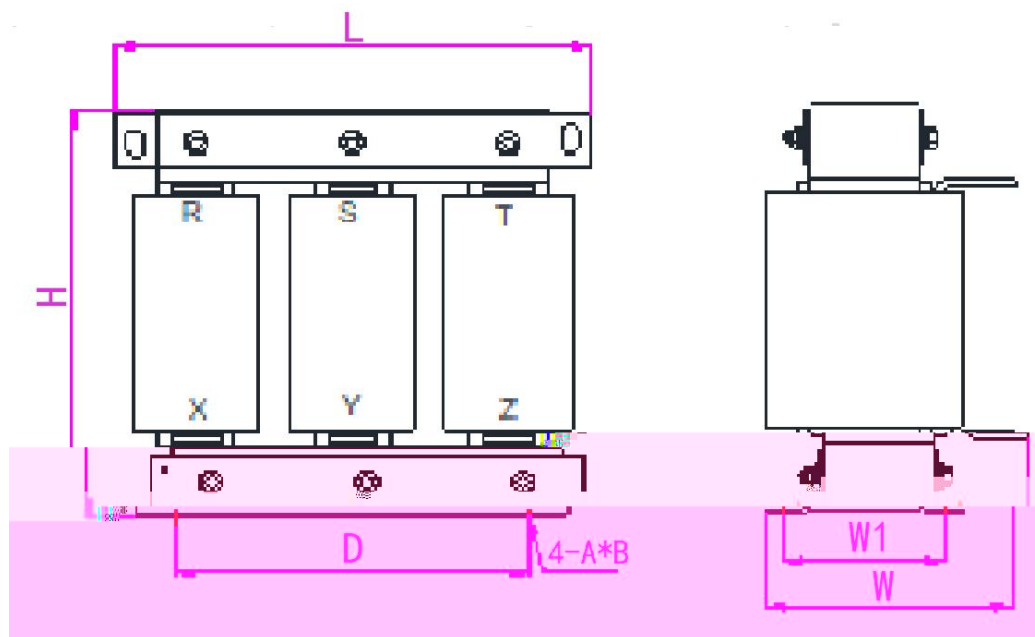

HF680NLC11M-200-6	ACR-0250-0M11-0.7SC	1
HF680NLC11M-250-6	ACR-0290-096U-0.7SC	1
HF680NLC11M-280-6	ACR-0330-085U-0.7SC	1
HF680NLC11M-315-6	ACR-0330-085U-0.7SC	1
HF680NLC11M-355-6	ACR-0390-072U-0.7SC	1
HF680NLC11M-400-6	ACR-0490-057U-0.7SC	1
HF680NLC11M-450-6	ACR-0490-057U-0.7SC	1
HF680NLC11M-500-6	ACR-0290-096U-0.7SC	2
HF680NLC11M-560-6	ACR-0330-085U-0.7SC	2
HF680NLC11M-630-6	ACR-0330-085U-0.7SC	2
HF680NLC11M-710-6	ACR-0390-072U-0.7SC	2
HF680NLC11M-800-6	ACR-0490-057U-0.7SC	2

HF680NLC11M-900-6	ACR-0490-057U-0.7SC	2
HF680NLC11M-1000-6	ACR-0600-047U-0.7SC	2
HF680NLC11M-1120-6	ACR-0680-042U-0.7SC	2
HF680NLC11M-1200-6	ACR-0680-042U-0.7SC	2
HF680NLC11M-500-6-S	ACR-0600-047U-0.7SC	1
HF680NLC11M-560-6-S	ACR-0600-047U-0.7SC	1
HF680NLC11M-630-6-S	ACR-0680-042U-0.7SC	1
HF680NLC11M-710-6-S	ACR-0810-035U-0.7SC	1
HF680NLC11M-800-6-S	ACR-0810-035U-0.7SC	1
HF680NLC11M-900-6-S	ACR-1000-028U-0.7SA	1
HF680NLC11M-1000-6-S	ACR-1000-028U-0.7SA	1
HF680NLC11M-1120-6-S	ACR-1200-022U-0.7SA	1
HF680NLC11M-1200-6-S	ACR-1200-022U-0.7SA	1
HF680NLC11C-1400-6	ACR-0810-035U-0.7SC	2
HF680NLC11C-1600-6	ACR-0810-035U-0.7SC	2

	L	± 5mm	W	H	D	W1	A*B
ACR-0250-0M11-0.7SC	290		220	260	214	122	11*18
ACR-0290-096U-0.7SC	290		260	280	214	132	11*18
ACR-0330-085U-0.7SC	290		230	310	214	122	11*18
ACR-0390-072U-0.7SC	320		245	330	243	144	11*18
ACR-0490-057U-0.7SC	320		250	350	243	155	11*18
ACR-0600-047U-0.7SC	320		260	320	243	154	11*18
ACR-0680-042U-0.7SC	360		260	320	243	154	11*18
ACR-0810-035U-0.7SC	365		280	385	260	164	15*25
ACR-1000-028U-0.7SA	435		290	495	350	174	15*25
ACR-1200-022U-0.7SA	485		355	435	400	186	15*25

	W	W	W
ACR-0200-0M14-0.7SC	73	232.7	305.7
ACR-0250-0M11-0.7SC	86	221.4	307.4
ACR-0290-096U-0.7SC	95	240.3	335.3
ACR-0330-085U-0.7SC	100.8	265.72	366.52
ACR-0390-072U-0.7SC	112.6	266.37	378.97
ACR-0490-057U-0.7SC	126.3	326.9	453.2
ACR-0600-047U-0.7SC	152.4	360.1	512.5
ACR-0680-042U-0.7SC	170	410	580
ACR-0810-035U-0.7SC	210	461	671
ACR-1000-028U-0.7SA	282	555	837
ACR-1200-022U-0.7SA	270	600	870

3.


	
1.	/ " "
2.	/
3.	
-	R S T
-	U V W
-	P1 P N
4.	12
5.	
	
1.	
2.	
3.	
40	

3.1


- - -20 +60
 - 0% 95%
 -
 -
 -
- 1

5

3.2

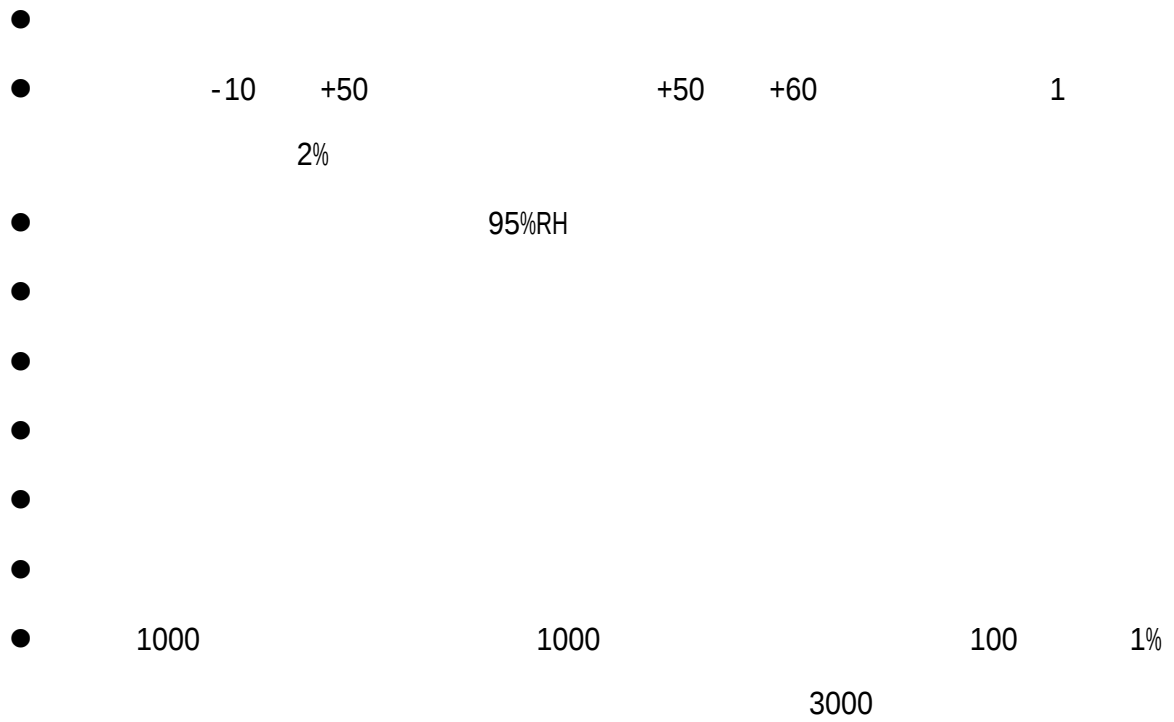


3.3

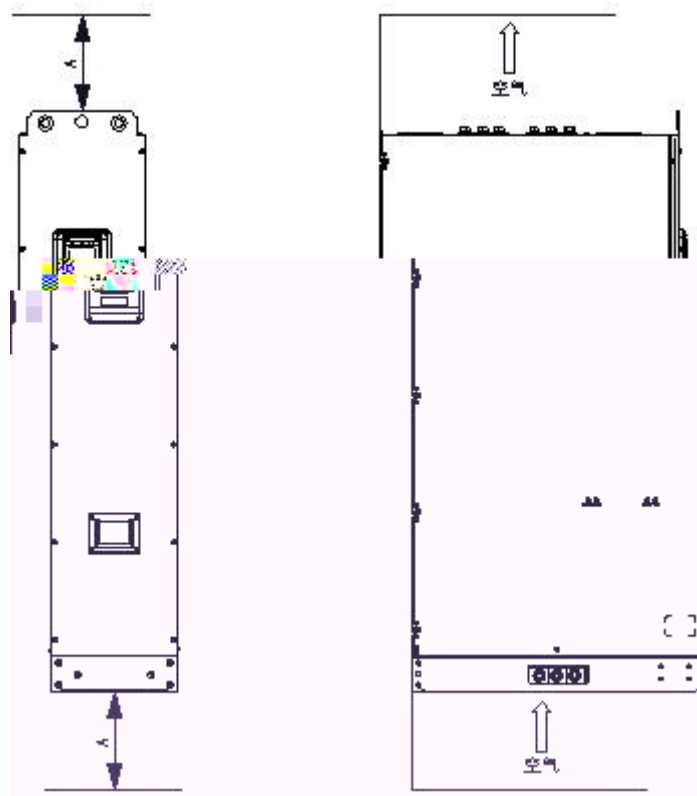

	A ≥ 200mm


3.4

1	1	M4
2	2	

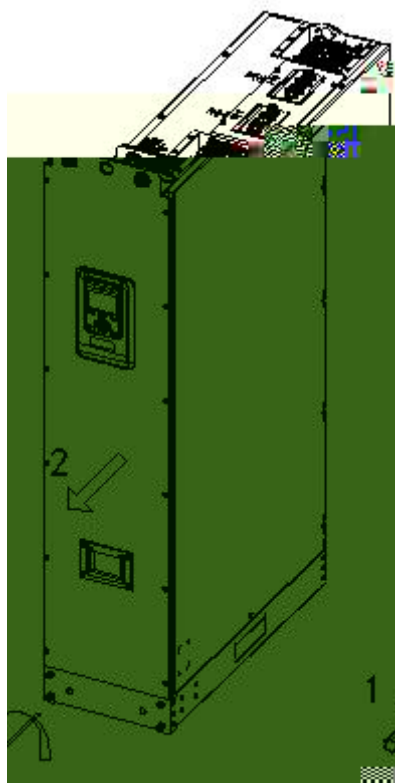

3-1

3.5 DP


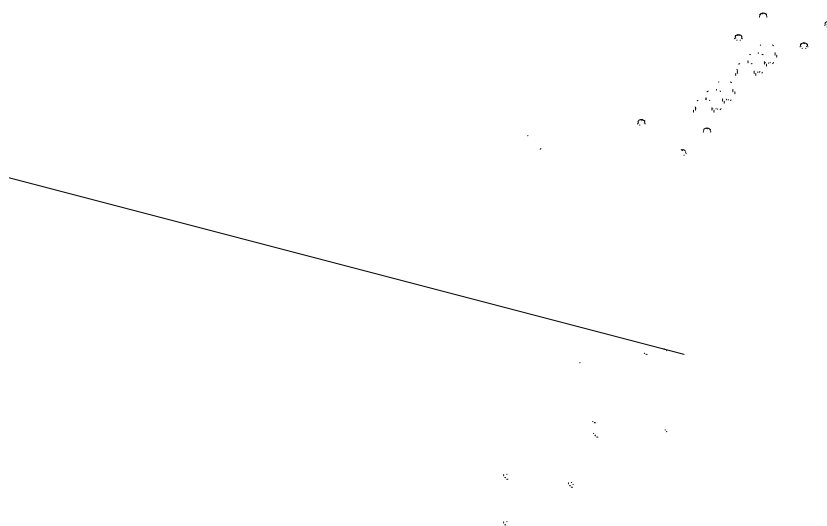


3.6 PG



1

2

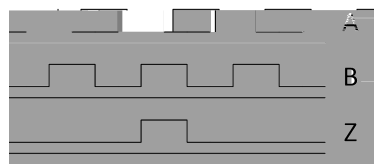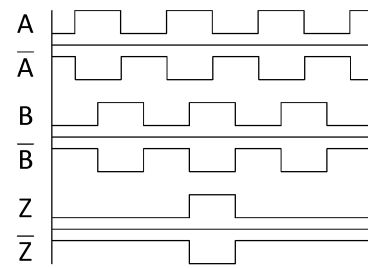


A

B

Z N 0

GDHF-APGX1

3.7.2

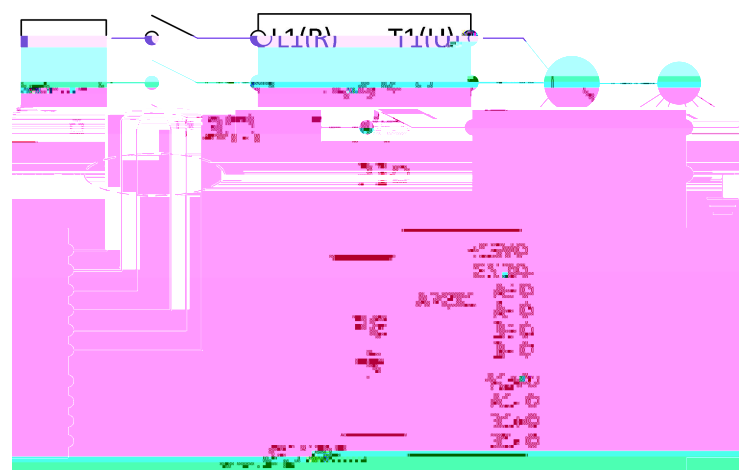

PG


PG

PE


3.7.3

PG

3.7.3.1

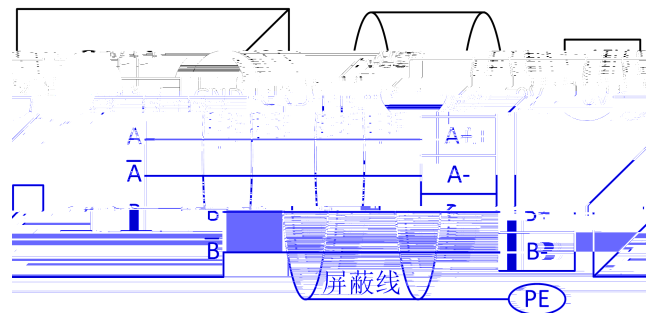


	HLE45-1024L-6F.AC
	RHI90N-ONAK1R61N-1024
	EC120P45-H6PR-1024

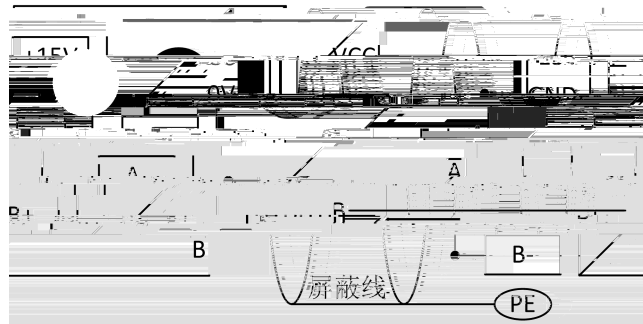


	HLE45-600L-3F.AC
	RVI78N-10CALA31N-1024
	EC120P45-P6PR-1024

3.7.3.2

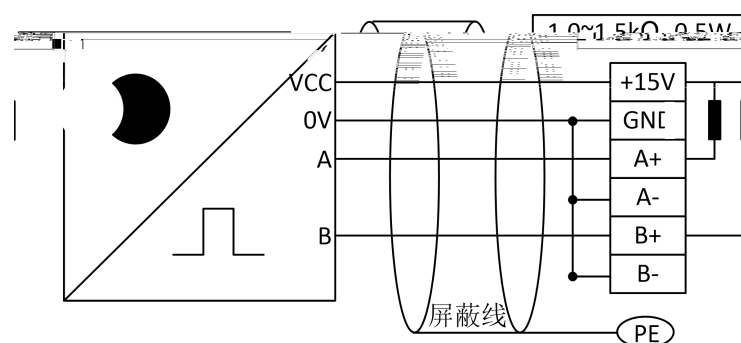



	HLE45-1024L-30C.AC
	EB38A6-C4PR-1024

3.7.3.3

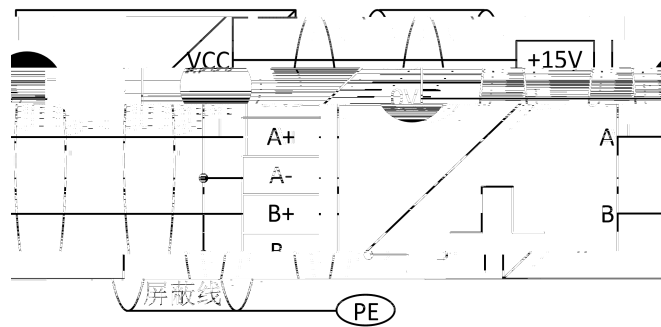

	HLE45-600L-3R.AC
	EB50A8-N4PR-1024

3.7.3.4

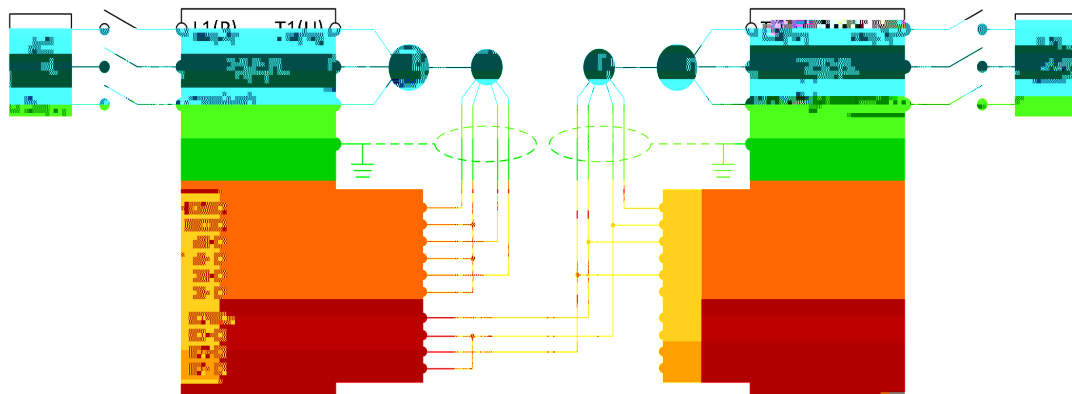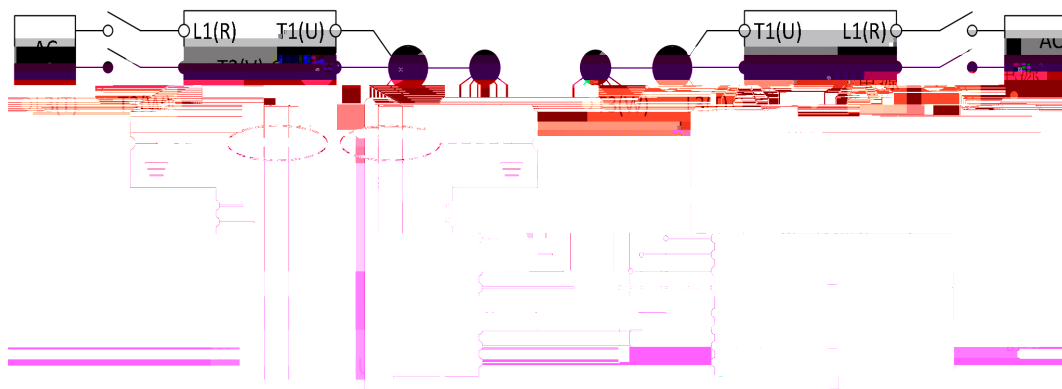

4.

4.1

1

2

3

4

5

6


7


12

U V W

U V W


4-1

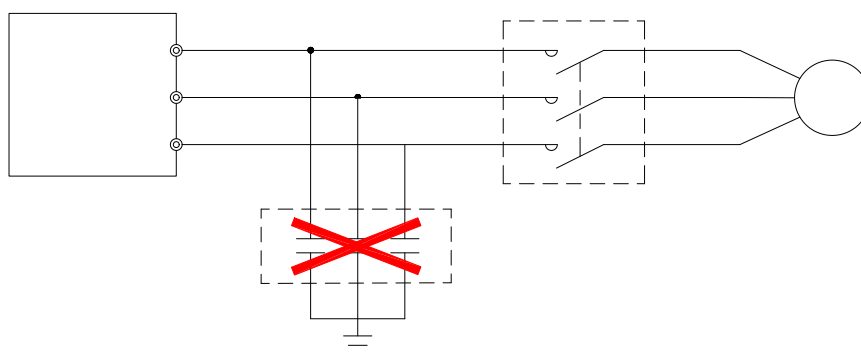

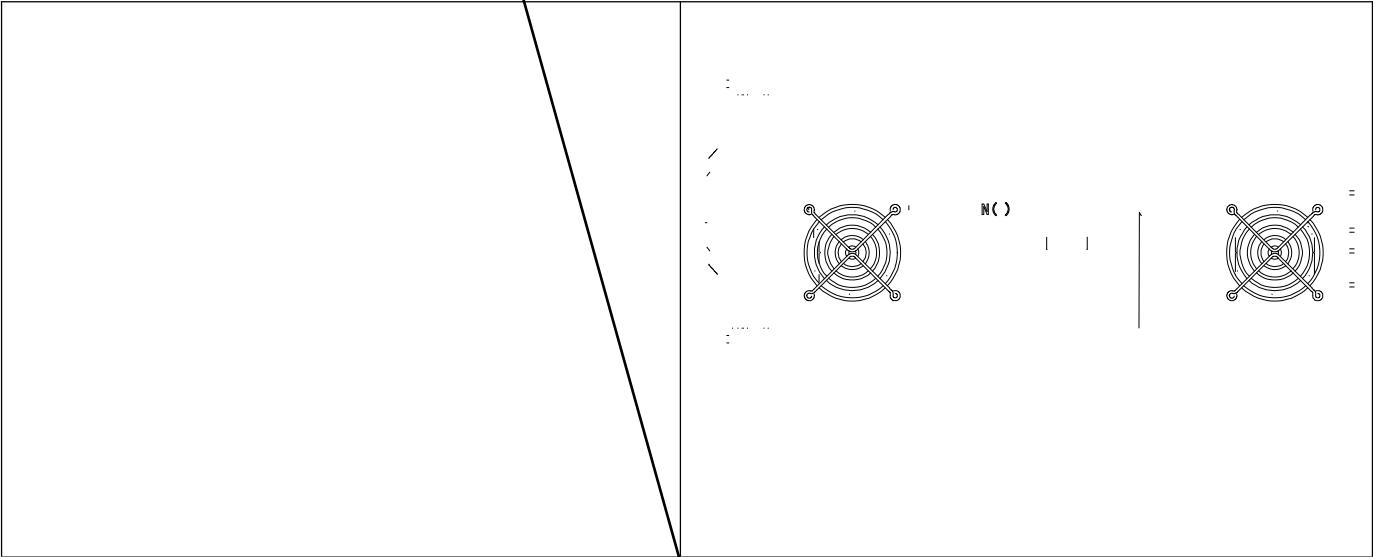

P +	
N -	
R S T	
U V W	
	


4.3

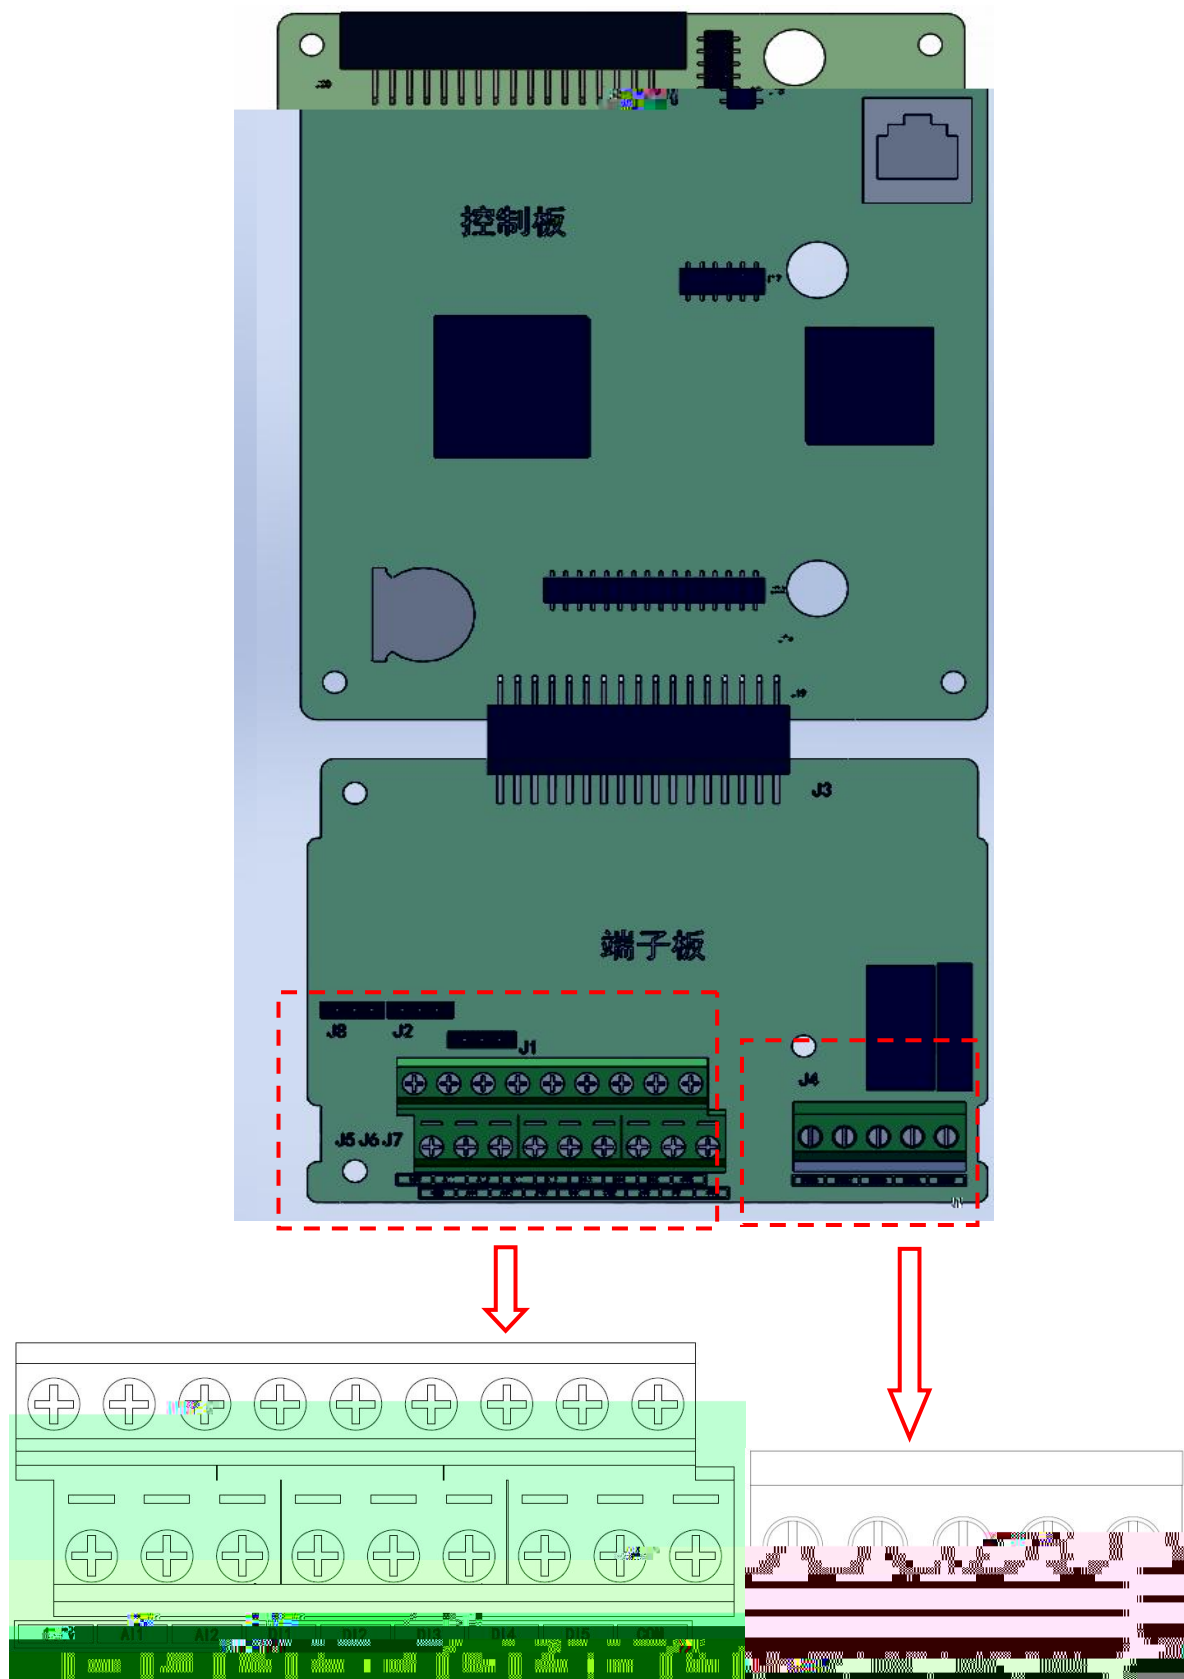

1

	1	2	3	4	5	6	7	8
	+10V	GND	AI1+	AI1-	AI2+	AI2-	A01	COM
	9	10	11	12	13	14	15	16
	A02	COM	DI1	DI2	DI3	DI4	COM	DI5
	17	18	19	20	21	22	23	24
	DI6	DI7	DI8	COM	+24V	D01	+24V	D02
	25	26	27	28	29	30	31	
	+24V	D03	D04A	D04C	D04B	D05A	D05C	

2

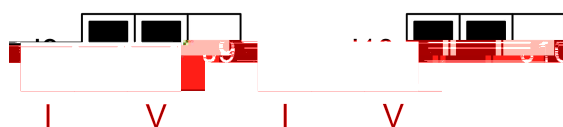

a.



b.


3


1	+10V	10V
2	GND	
3	AI1+/AV1	1 0/4 20mA 1 -10 10V
4	AI1-	1
5	AI2+/AV2	2 0/4 20mA 2 -10 10V

27	D04A	4
28	D04C	4
29	D04B	4
30	D05A	5
31	D05C	5


4.4

6

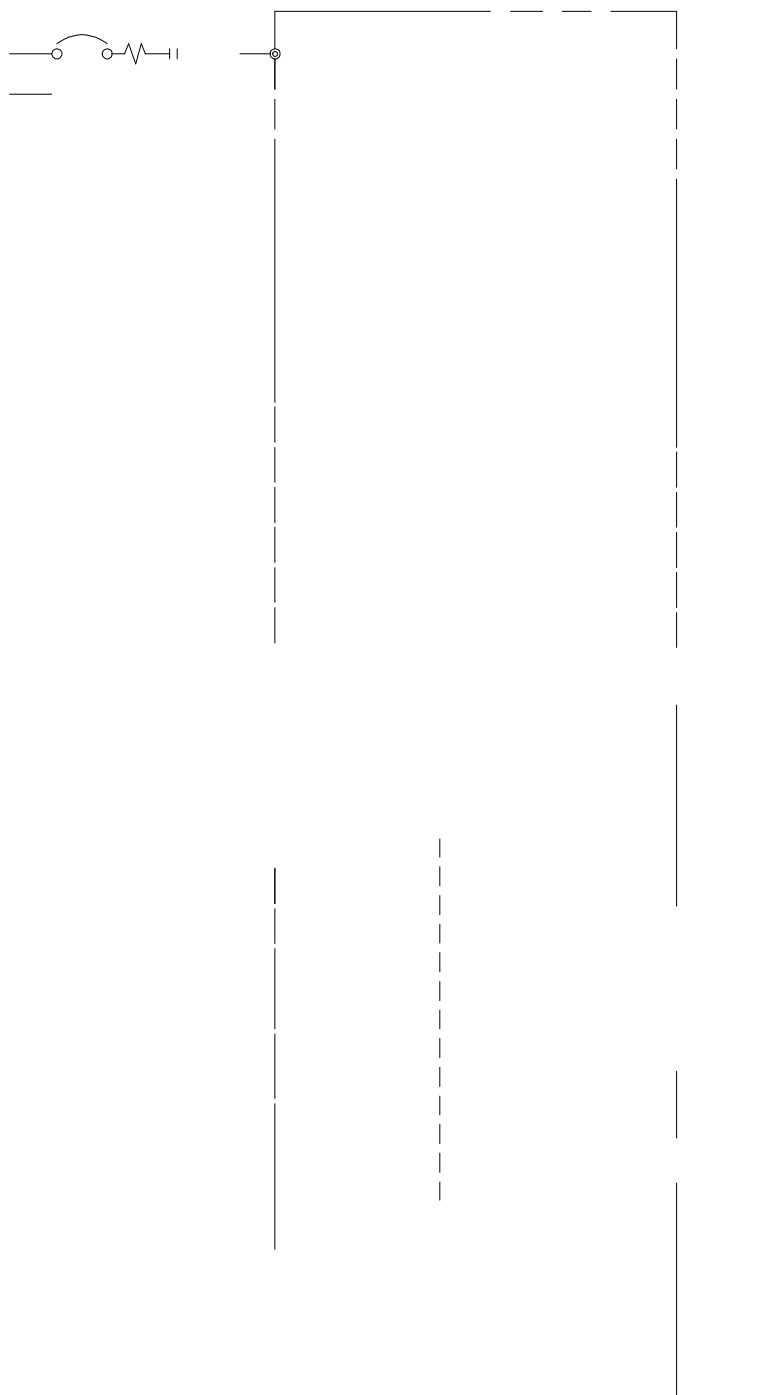

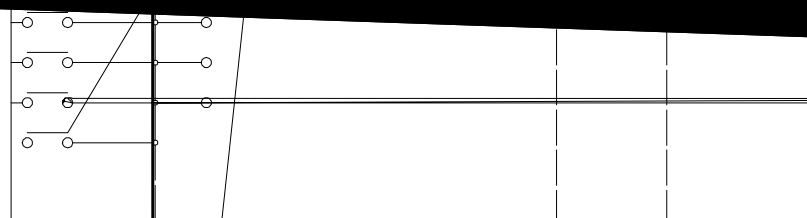


4.5

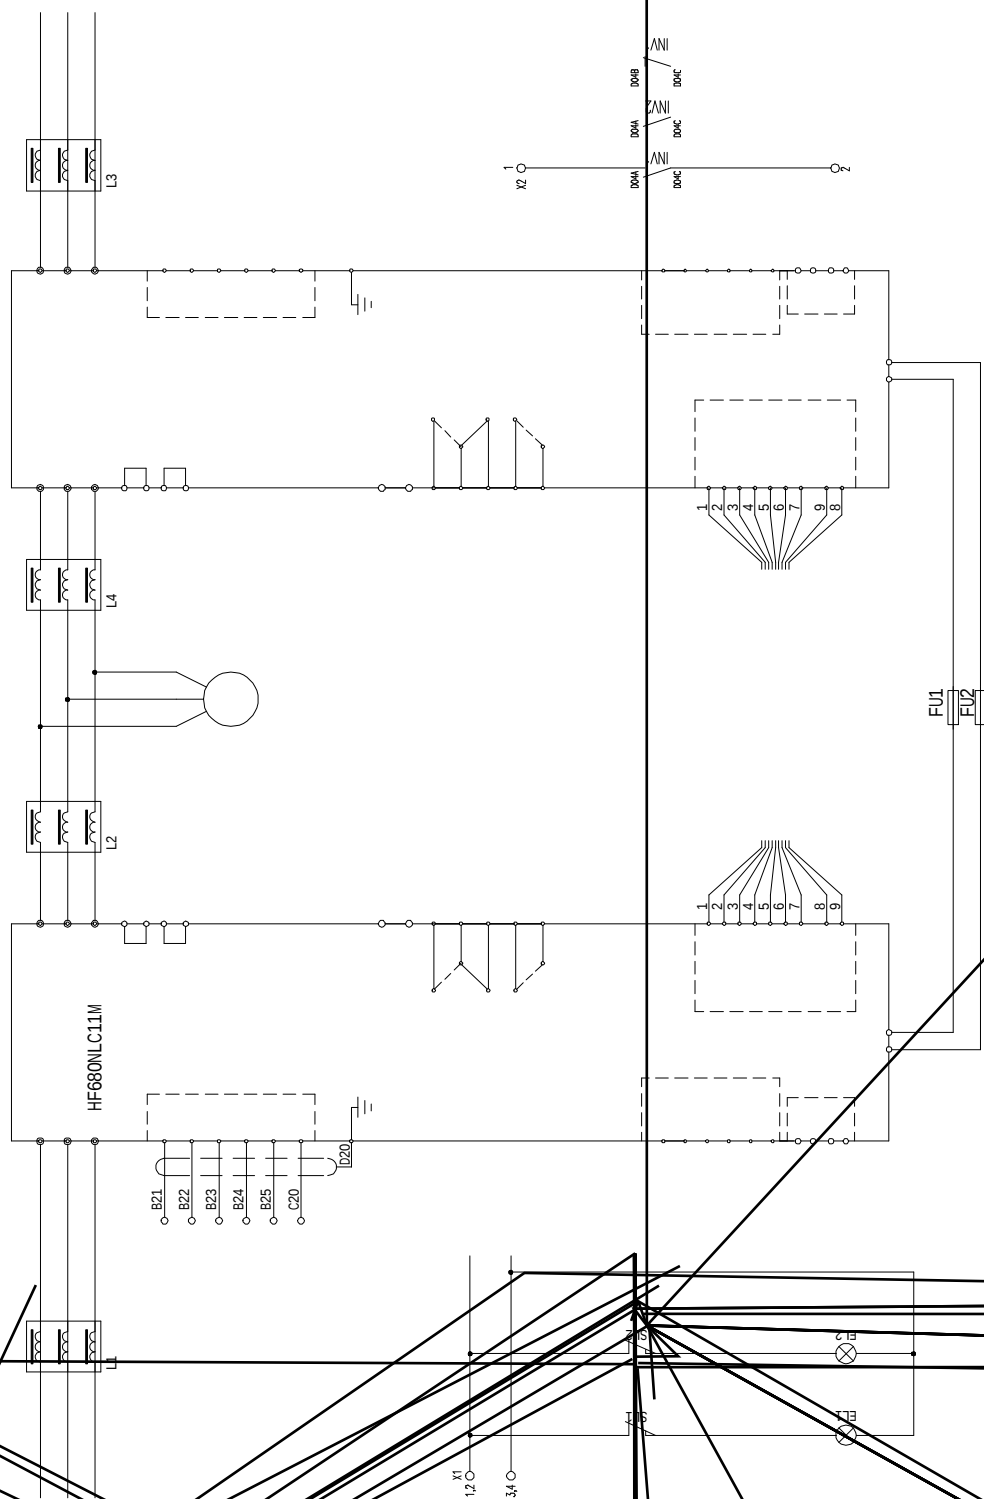

4.6

W2
6



2014-2015

-

2014-2015

2014-2015

2014-2015

4.7

	A	/ CEFR	mm ² 40%	A (AC- 3)
HF680NLC11M-200-6	264		95	240
HF680NLC11M-250-6	348		120	320
HF680NLC11M-280-6	384		150	350
HF680NLC11M-315-6	426		2*70	390
HF680NLC11M-355-6	468		2*95	430
HF680NLC11M-400-6	504		2*95	460
HF680NLC11M-450-6	566		2*95	520
HF680NLC11M-500-6	654		2*120	600
HF680NLC11M-560-6	732		2*150	670
HF680NLC11M-630-6	810		4*70	750
HF680NLC11M-710-6	912		4*70	840
HF680NLC11M-800-6	972		4*95	890
HF680NLC11M-900-6	1092		4*95	1000
HF680NLC11M-1000-6	1230		4*120	1130
HF680NLC11M-1120-6	1356		4*150	1250
HF680NLC11M-1200-6	1536		4*150	1410
HF680NLC11M-500-6-S	2*330		2*120	2*320
HF680NLC11M-560-6-S	2*370		2*150	2*350
HF680NLC11M-630-6-S	2*410		4*70	2*390
HF680NLC11M-710-6-S	2*460		4*70	2*430

HF680NLC11M-800-6-S	2*590	4*95	2*460
HF680NLC11M-900-6-S	2*550	4*95	2*520
HF680NLC11M-1000-6-S	2*620	4*120	2*600
HF680NLC11M-1120-6-S	2*680	4*150	2*670
HF680NLC11M-1200-6-S	2*770	4*150	2*710
HF680NLC11C-1400-6	1824	8*70	1680
HF680NLC11C-1600-6	1944	8*95	1790

4.8

	(KW)		
HF680NLC11M-200-6	200	250A	0.055 mH
HF680NLC11M-250-6	250	290A	0.048 mH
HF680NLC11M-280-6	280	330A	0.042 mH
HF680NLC11M-315-6	315	390A	0.036 mH
HF680NLC11M-355-6	355	390A	0.036 mH
HF680NLC11M-400-6	400	490A	0.028 mH
HF680NLC11M-450-6	450	490A	0.028 mH
HF680NLC11M-500-6 HF680NLC11M-500-6-S	500	600A	0.023 mH
HF680NLC11M-560-6 HF680NLC11M-560-6-S	560	600A	0.023 mH
HF680NLC11M-630-6 HF680NLC11M-630-6-S	630	810A	0.017 mH

HF680NLC11M-710-6 HF680NLC11M-710-6-S	710	810A	0.017 mH
HF680NLC11M-800-6 HF680NLC11M-800-6-S	800	810A	0.017 mH
HF680NLC11M-900-6 HF680NLC11M-900-6-S	900	1025A	0.013 mH
HF680NLC11M-1000-6 HF680NLC11M-1000-6-S	1000	1025A	0.013 mH
HF680NLC11M-1120-6 HF680NLC11M-1120-6-S	1120	1280A	0.011 mH
HF680NLC11M-1200-6 HF680NLC11M-1200-6-S	1200	1280A	0.011 mH
HF680NLC11C-1400-6	1400		
HF680NLC11C-1600-6	1600		

4.9 EMC

1 EMC

EMC electromagnetic compatibility

EMC

EMC



2 EMC EMC EMC



20cm

20cm

90

c

EMC

d

100m

e


5.

5.1

HF680NLC11M

F1 LOCAL/REMOTE F2 RUN STOP

5.2

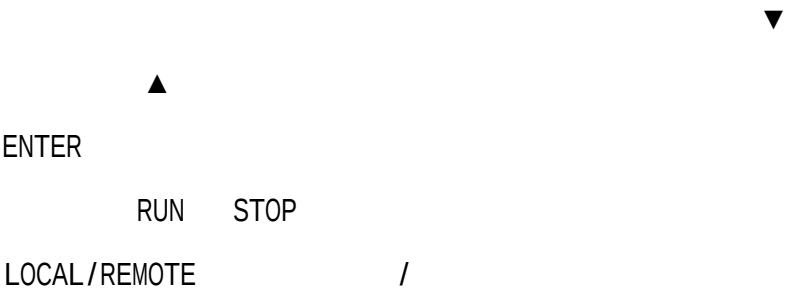


5.3



“ ” “ ” 2

|

	“ _ ”
	:V
	A
	N N W E

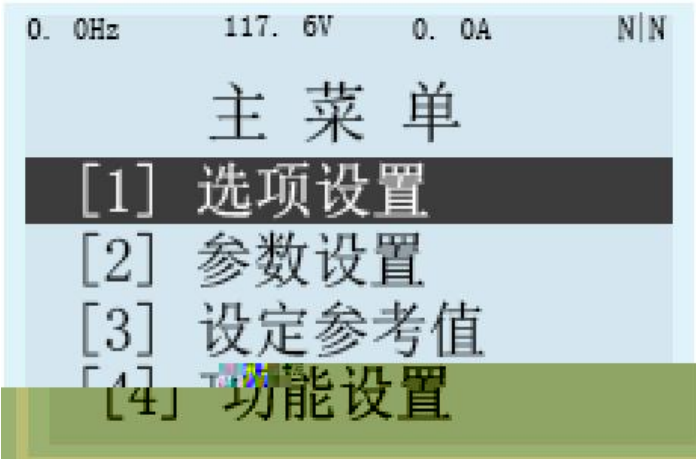

4

ENTER

F1/F2

5.4

1	Option Set	
2	Parameter Setting	/
3	Reference Set	
4	Function Setting	


5	Fault Record	
6	Security	



1	Choose Direction	
2	Reset Error	
3	Menu Language	
4	Monitor Setting	
5	LCD Contrast	
6	Time Setting	
7	Version	

8	OLD COM	
---	---------	--

5.4.2

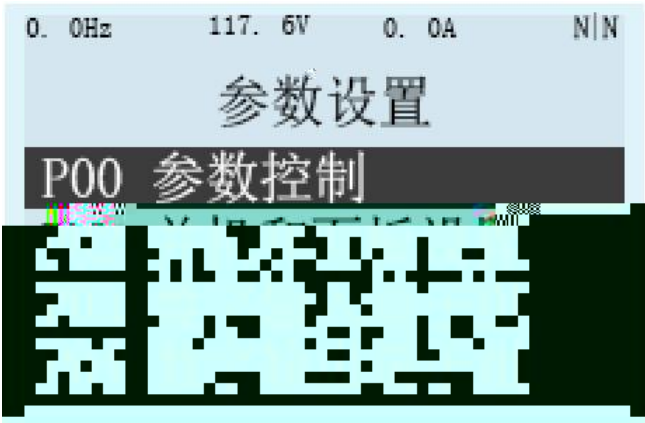

Parameter Setting

5.4.3



Reference Set

Reference Set	Speed	[Hz]	Hz
		[%]	%
	Torque	[%]	%

	Torque limiter	[%]	%
	1	[%]	1
	2	[%]	2

5.4.4



Function Setting

1	MotoTuning I	
2	MotoTuning II	
3	MotoTuning III	
4	DC-Link Tuning (AFE)	AFE
5	Shortcut Paras Setting	

6	Parameter Initialization	
7	Delete Fault Records	
8	System Restart	
9	Backup Parameter	
10	Recover Parameter	
11	Compare Parameter	
12	Backup Para DSP DSP	DSP
13	Restore Para DSP DSP	DSP

1


2

5




“ Enter ”

5.4.5

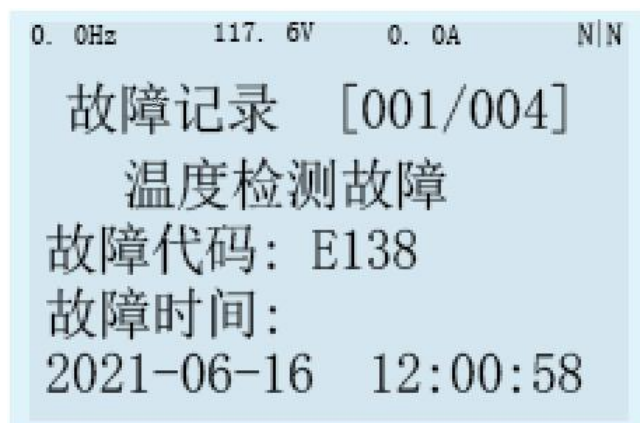

Fault Record


5.4.6

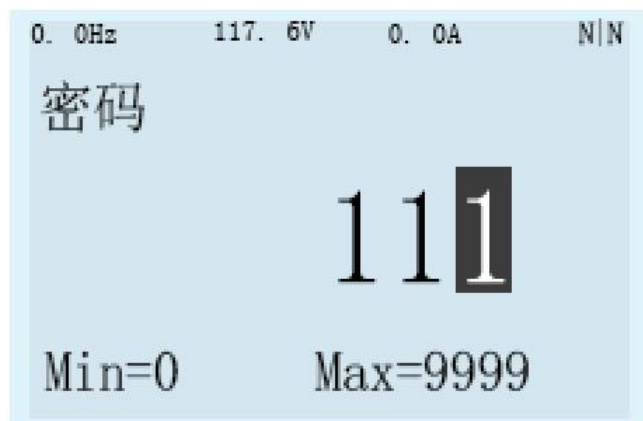

Access Permissions

6.

6.1

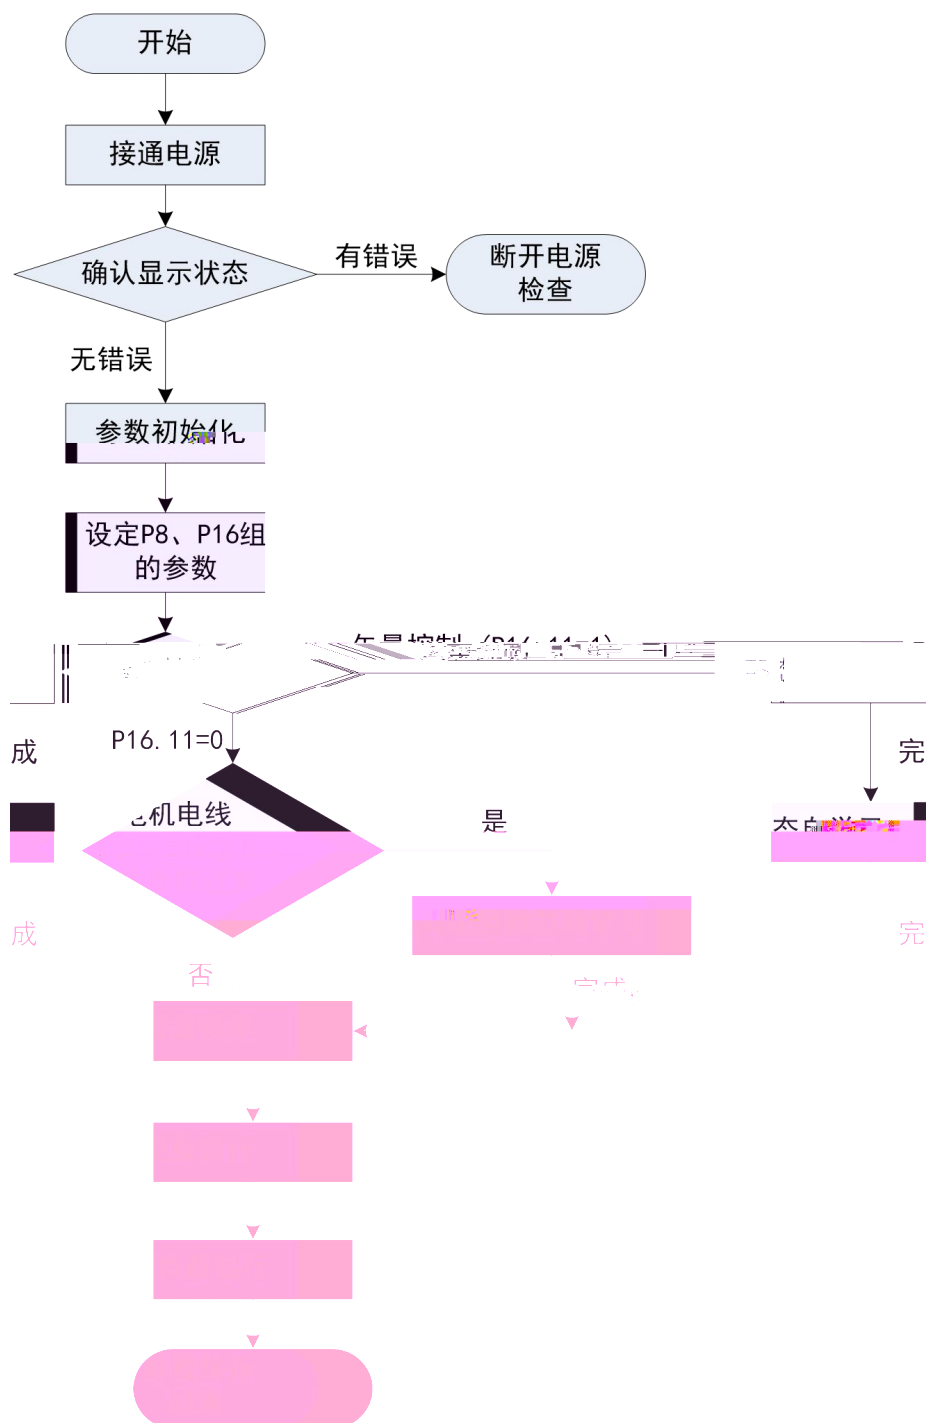

/

V/F	P16.11=0	V/F
	P16.11=2	P16.11=1

6.2

6.2.1

1		
	AC660~690V	50/60Hz
2		U,V,W
3		
4	PG	PG
5		

6.2.2

0.0Hz	680.3V	0A	N/N
-------	--------	----	-----

0.0Hz 电机速度 Hz

680.3V 母线电压

0A 电机电流

故障 E: [105] !!!

欠压

0.0Hz	300V	0A	W/E
-------	------	----	-----

故障 E: [105] !!!

欠压

6.2.3

5.4 “ ”


6.2.4

7.7

P8.0		[0] [1] [2]DP [3]MODBUS [4]	1
P8.3		[0] [1]	1
P8.6		0 300s	0
P8.7			0
P8.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	3
P8.14		0.1 10.0	1
P8.15	1		100
P8.16	1	P8.15	3
P8.17	2		200
P8.18	2	P8.15 P8.17	4
P8.33		0.1 10.0	1
P8.34	1		100
P8.35	1	P8.34	3
P8.36	2		200
P8.37	2	P8.34 P8.36	4

P16.0		380V
P16.2		
P16.3		
P16.4		
P16.5		
P16.6		
P16.7		$120 \times P16.5 / P16.6$
P16.9		$120 \times P16.5 / P16.7$
P16.11		[0]V/F [1] [2]

6.2.5

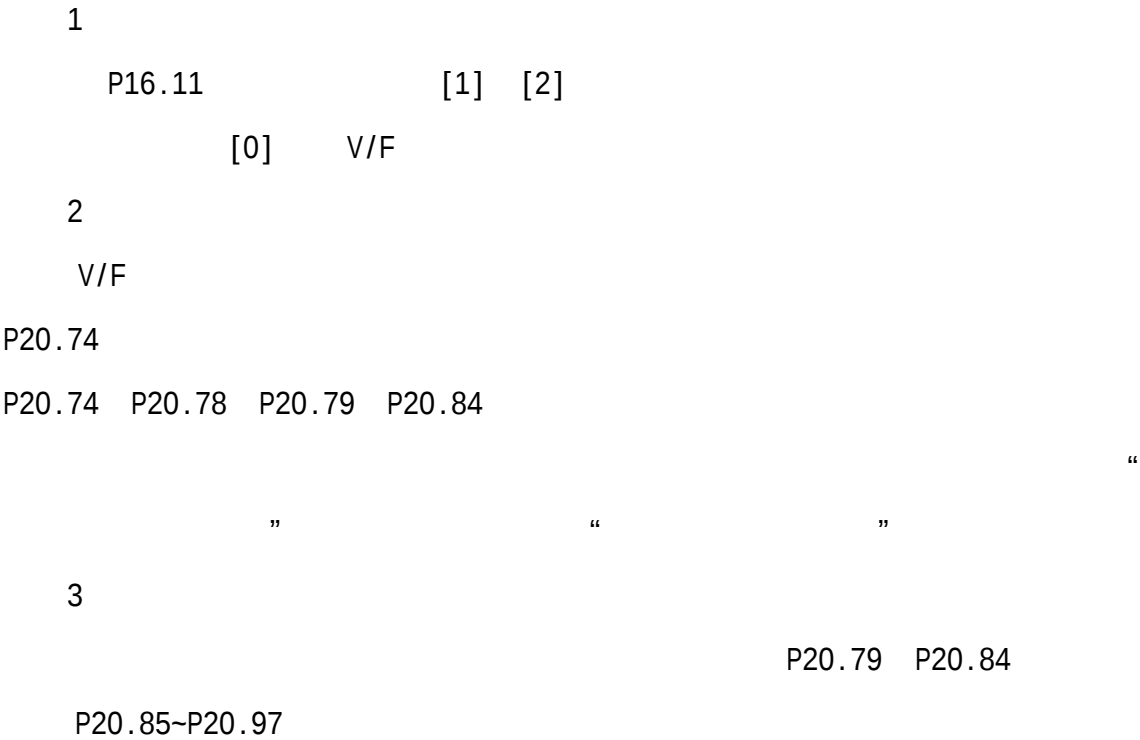

“

”

“

”

4

50%

P20.98

P20.98

6.2.6

HF680NLC

7.5%

50%

50%

1/5

P16

V/

F

1				
2		LOCAL/REMOTE	LOCAL	LOCAL
3		RUN	RUN	
		5Hz		
4				
5	4			50Hz
6		STOP		

6.2.8

1	
2	
3	
4	
5	
6	STOP

1
2

1
2

6.2.9

7.

7.1

P2

P2.0	[0]				
	[1]		0	2	0
	[2]				

8.1

P2.1	[0]	,		m "

3		
4	.NC	
5		</RST
6	1 0	8.2
7	2 1	
8	3 2	
9	4 3	
10		
11		
12		
13	.NC	
14		
15	.NC	
16		
17	0	1 0 00
18	1	1 01 2 10 3 11 4
19		
20		AFE
21		
22	FUNC 22	
23	FUNC 23	
24		
25	FUNC 25	
26		
27	FUNC 27	
28		
29	FUNC 29	

7.3

P4

P4.0	1		0 64	0	
P4.1	2		0 64	0	
P4.2	3		0 64	0	
P4.3	4		0 64	0	
P4.4	5		0 64	0	
P4.16	1		0 500	0	
P4.17	2		0 500	0	
P4.18	3		0 500	0	
P4.19	4		0 500	0	

0

18	1	2
19	2	3
20	3	4
21	FUNC 21	
22		
23		
24 31	FUNC 24 FUNC 31	
32		AFE
33 48	FUNC 33 FUNC 48	
49	PROFIBUS 1	PROFIBUS 1
50	PROFIBUS 2	PROFIBUS 2
51	PROFIBUS 3	PROFIBUS 3
52	PROFIBUS 4	PROFIBUS 4
53	PROFIBUS 5	PROFIBUS 5
54 56	FUNC 54 FUNC 56	
57	1	
58	2	
59	3	
60	4	
61	1	1
62	2	2
63	3	3
64	4	4

7.4

P5

P5.0	AI1	[0] [1]0 +10V [2]-10 +10V [3]0 20mA	0 3	1	
P5.1	AI1	AI1	0.0 1000.0 [ms]	25.0 [ms]	
P5.2	AI1	AI1	-10.00 10.00 [V]	0.000 [V]	8.4
P5.3	AI1	AI1	-20.00 20.00 [mA]	0.000 [mA]	8.4
P5.4	AI1	AI1	-10.00 10.00 [V]	0.000 [V]	8.4
P5.5	AI1	AI1	0.00 20.00 [mA]	0.000 [mA]	8.4
P5.6	AI1	AI1	-300.0 300.0 [%]	0.0 [%]	8.4
P5.7	AI1	AI1	-10.00 10.00 [V]	10.000 [V]	8.4
P5.8	AI1	AI1	0.00 20.00 [mA]	20.000 [mA]	8.4
P5.9	AI1	AI1	-300.0 300.0 [%]	100.0 [%]	8.4
P5.18	AI2	[0] [1]0 +10V [2]-10 +10V [3]0 20mA	0 3	3	

		A12			
P5.19	A12		0.0 1000.0 [ms]	25.0 [ms]	
P5.20	A12	A12	-10.00 10.00 [V]	0.000 [V]	
P5.21	A12	A12	-20.00 20.00 [mA]	0.000 [mA]	
P5.22	A12	A12	-10.00 10.00 [V]	0.000 [V]	
P5.23	A12	A12	0.00 20.00 [mA]	0.000 [mA]	
P5.24	A12	A12	-300.0 300.0 [%]	0.0 [%]	
P5.25	A12	A12	-10.00 10.00 [V]	10.000 [V]	
P5.26	A12	A12	0.00 20.00 [mA]	20.000 [mA]	
P5.27	A12	A12	-300.0 300.0 [%]	100.0 [%]	

7.5

P6

P6.0	A01	7-1	0 14	2	
P6.1	1		0 1000	0	8.5
P6.2	A01	A01	-300.0 300.0 [%]	0.0 [%]	8.5
P6.3	A01	A01	-300.0 300.0 [%]	100.0 [%]	8.5
P6.4	A01 [mA V]	A01	0.0 100.0 [%]	0.0 [%]	8.5
P6.5	A01 [mA V]	A01	0.0 100.0 [%]	100.0 [%]	8.5
P6.6	A01	A01	-100.00 100.00 [%]	0.00 [%]	
P6.7	A01	A01 (P6.0 [13])	0.0 100.0 [%]	0.0 [%]	
P6.8	A01	A01	0.0 1000.0 [ms]	10.0 [ms]	
P6.14	A02	7-1	0 14	4	
P6.15	2		0 1000	0	
P6.16	A02	A02	-300.0 300.0 [%]	0.0 [%]	
P6.17	A02	A02	-300.0 300.0 [%]	100.0 [%]	
P6.18	A02 [mA V]	A02	0.0 100.0 [%]	0.0 [%]	
P6.19	A02 [mA V]	A02	0.0 100.0 [%]	100.0 [%]	
P6.20	A02	A02	-100.00 100.00 [%]	0.00 [%]	

P6.21	A02	A02 (P6.14 [13])	0.0 100.0 [%]	0.0 [%]	
P6.22	A02	A01	0.0 1000.0 [ms]	10.0 [ms]	

7-1

0		
1		
2		
3		
4		
5		
6		
7		
8	(%)	()
9		
10		
11	(%)	(150)
12	DP	Profibus
13		P6.7 P6.21
14		

7.6

P7

P7.0	[1]	1	0.0 300.0 [%]	180.0 [%]	8.6
P7.1	[2]	2	0.0 300.0 [%]	180.0 [%]	8.6
P7.2	[3]	3	0.0 300.0 [%]	180.0 [%]	8.6
P7.3	[4]	4	0.0 300.0 [%]	180.0 [%]	8.6
P7.4	[1]	1	0.0 300.0 [%]	235.0 [%]	8.6
P7.5	[2]	2	0.0 300.0 [%]	235.0 [%]	8.6
P7.6	[3]	3	0.0 300.0 [%]	235.0 [%]	8.6
P7.7	[4]	4	0.0 300.0 [%]	235.0 [%]	8.6
P7.8	[1]	1	0.0 100.0 [%]	20.0 [%]	8.6
P7.9	[2]	2	0.0 100.0 [%]	20.0 [%]	8.6
P7.10	[3]	3	0.0 100.0 [%]	20.0 [%]	8.6
P7.11	[4]	4	0.0 100.0 [%]	20.0 [%]	8.6
P7.12			800 1250 [V]	1200 [V]	8.6

P7.13			400 750 [V]	550 [V]	8.6
P7.14			60.0 100.0 []	87.5 []	8.6
P7.15			50.0 100.0 []	80.0 []	8.6
P7.19	[1]	1	100.0 720.0 [%]	120.0 [%]	8.6
P7.20	[2]	2	100.0 720.0 [%]	120.0 [%]	8.6
P7.21	[3]	3	100.0 720.0 [%]	120.0 [%]	8.6
P7.22	[4]	4	100.0 720.0 [%]	120.0 [%]	8.6
P7.23	1 M1	1	0.00 3.00 [s]	0.50 [s]	8.6
P7.24	1 M2	2	0.00 3.00 [s]	0.50 [s]	8.6
P7.25	1 M3	3	0.00 3.00 [s]	0.50 [s]	8.6
P7.26	1 M4	4	0.00 3.00 [s]	0.50 [s]	8.6
P7.27	1	1	0.00 3.00 [s]	2.00 [s]	
P7.28	2	2	0.00 3.00 [s]	2.00 [s]	
P7.29	3	3	0.00 3.00 [s]	2.00 [s]	

P7.30	4	4	0.00 3.00 [s]	2.00 [s]	
P7.31			0.0 100.0 [%]	25.0 [%]	
P7.32			0.00 5.00 [s]	1 [s]	
P7.33			0.0 1000.0 [s]	360.0 [s]	
P7.47			0.0 300.0 [%]	100.0 [%]	8.6
P7.48	1	1 ≥1200Kw 1 = 110%	0.0 300.0 [%]	150.0 [%] <1200Kw 110.0[%] ≥1200Kw	8.6
P7.49	1	1	0.00 60.00 [s]	60.00 [s]	8.6
P7.50	2	2 ≥1200Kw 2 = 141%	0.0 300.0 [%]	200.0[%] <1200Kw 141.0[%] ≥1200Kw	8.6
P7.51	2	2 ≥1200Kw 2 = 1.00s	0.00 5.00 [s]	5.00[s] <1200Kw 1.00[s] ≥1200Kw	8.6
P7.55		[0] [1]	0 1	0	
P7.56			0.0 200.0 [%]	120.0 [%]	
P7.57			0.0 12.0 [s]	5 [s]	
P7.59		[0] [1]	0 1	1	
P7.60			0.10 3.00 [s]	0.30 [s]	

P7.64		[0] [1]	0 1	0	8.6
P7.65			-25 100 [V]	0 [V]	8.6
P7.66			-25 100 [V]	0 [V]	8.6
P7.69		[0] [1]	0 1	0	8.6
P7.70			-25 100 [V]	0 [V]	8.6
P7.73		[0] [1]	0 1	0	
P7.74			400 750 [V]	550 [V]	
P7.75			0.0 1000.0 [%]	100.0 [%]	
P7.76			0.00 300.00 [s]	1.00 [s]	
P7.77			0.0 200.0 [%]	15.0 [%]	
P7.94		[0] [1]	0 1	1	
P7.95		AFE	0.0 3000.0 [s]	15.0 [s]	
P7.96			0.00 300.00 [s]	0.00 [s]	

7.7 1 P8

P8.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P8.1					
P8.2					
P8.3		[0] [1]	0 1	0	8.7
P8.6			0.00 300.00 [s]	0.00 [s]	8.7
P8.7			0.00 300.00 [s]	0.00 [s]	8.7
P8.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P8.11					
P8.13		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P8.14			0.1 10.0	1.0	8.7
P8.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P8.16	1	P8.15	0.0 300.0 [s]	3.00 [s]	8.7
P8.17	2		0.0 300.0 [%]	200.0 [%]	8.7

P8.18	2	P8.15 P8.17	0.0 300.0 [s]	4.00 [s]	8.7
P8.19	3		0.0 300.0 [%]	240.0 [%]	8.7
P8.20	3	P8.17 P8.19	0.0 300.0 [s]	7.00 [s]	8.7
P8.21	4		0.0 300.0 [%]	300.0 [%]	8.7
P8.22	4	P8.19 P8.21	0.0 300.0 [s]	10.00 [s]	8.7
P8.23	5		0.0 300.0 [%]	300.0 [%]	8.7
P8.24	5	P8.21 P8.23	0.0 300.0 [s]	10.00 [s]	8.7
P8.25	6		0.0 300.0 [%]	300.0 [%]	8.7
P8.26	6	P8.23 P8.25	0.0 300.0 [s]	10.00 [s]	8.7
P8.27	7		0.0 300.0 [%]	300.0 [%]	8.7
P8.28	7	P8.25 P8.27	0.0 300.0 [s]	10.00 [s]	8.7
P8.29	8		0.0 300.0 [%]	300.0 [%]	8.7
P8.30	8	P8.27 P8.29	0.0 300.0 [s]	10.00 [s]	8.7
P8.32		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P8.33			0.1 10.0	1.0	8.7
P8.34	1		0.0 300.0 [%]	100.0 [%]	8.7
P8.35	1	P8.34	0.0 300.0 [s]	3.00 [s]	8.7
P8.36	2		0.0 300.0 [%]	200.0 [%]	8.7

P8.37	2	P8.34 P8.36	0.0 300.0 [s]	4.00 [s]	8.7
P8.38	3		0.0 300.0 [%]	240.0 [%]	8.7
P8.39	3	P8.36 P8.38	0.0 300.0 [s]	7.00 [s]	8.7
P8.40	4		0.0 300.0 [%]	300.0 [%]	8.7
P8.41	4	P8.38 P8.40	0.0 300.0 [s]	10.00 [s]	8.7
P8.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P8.43	5	P8.40 P8.42	0.0 300.0 [s]	10.00 [s]	8.7
P8.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P8.45	6	P8.42 P8.44	0.0 300.0 [s]	10.00 [s]	8.7
P8.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P8.47	7	P8.44 P8.46	0.0 300.0 [s]	10.00 [s]	8.7
P8.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P8.49	8	P8.46 P8.48	0.0 300.0 [s]	10.00 [s]	8.7
P8.54			0.0 300.0 [%]	0.0 [%]	
P8.55		[0] [1]	0 1	0	
P8.56			0.00 300.00 [s]	3.00 [s]	
P8.57		[0] [1]	0 1	1	
P8.58			0.00 300.00 [s]	1.50 [s]	

7.8 2 P9

P9.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P9.1					
P9.2					
P9.3		[0] [1]	0 1	0	8.7
P9.6			0.00 300.00 [s]	0.00 [s]	8.7
P9.7			0.00 300.00 [s]	0.00 [s]	8.7
P9.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P9.11					
P9.13		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P9.14			0.1 10.0	1.0	8.7
P9.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P9.16	1	P9.15	0.0 300.0 [s]	3.00 [s]	8.7
P9.17	2		0.0 300.0 [%]	200.0 [%]	8.7

P9.18	2	P9.15	P9.17	0.0 000.0 [s]	4.00 [s]	8.7
P9.19	3	5				

P9.37	2	P9.34	P9.36	0.0 300.0 [s]	4.00 [s]	8.7
P9.38	3			0.0 300.0 [%]	240.0 [%]	8.7
P9.39	3	P9.36	P9.38	0.0 300.0 [s]	7.00 [s]	8.7
P9.40	4			0.0 300.0 [%]	300.0 [%]	8.7
P9.41	4	P9.38	P9.40	0.0 300.0 [s]	10.00 [s]	8.7
P9.42	5			0.0 300.0 [%]	300.0 [%]	8.7
P9.43	5	P9.40	P9.42	0.0 300.0 [s]	10.00 [s]	8.7
P9.44	6			0.0 300.0 [%]	300.0 [%]	8.7
P9.45	6	P9.42	P9.44	0.0 300.0 [s]	10.00 [s]	8.7
P9.46	7			0.0 300.0 [%]	300.0 [%]	8.7
P9.47	7	P9.44	P9.46	0.0 300.0 [s]	10.00 [s]	8.7
P9.48	8			0.0 300.0 [%]	300.0 [%]	8.7
P9.49	8	P9.46	P9.48	0.0 300.0 [s]	10.00 [s]	8.7
P9.54				0.0 300.0 [%]	0.0 [%]	
P9.55		[0] [1]		0 1	0	
P9.56				0.00 300.00 [s]	3.00 [s]	
P9.57		[0] [1]		0 1	1	
P9.58				0.00 300.00 [s]	1.50 [s]	

7.9 3 P10

P10.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P10.1					
P10.2					
P10.3		[0] [1]	0 1	0	8.7
P10.6			0.00 300.00 [s]	0.00 [s]	8.7
P10.7			0.00 300.00 [s]	0.00 [s]	8.7
P10.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P10.11					
P10.13		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P10.14			0.1 10.0	1.0	8.7
P10.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P10.16	1	P10.15	0.0 300.0 [s]	3.00 [s]	8.7
P10.17	2		0.0 300.0 [%]	200.0 [%]	8.7

P10.18	2	P10.15	P10.17	0.0 300.0	4.00	8.7
				[s]	[s]	
P10.19	3			0.0 300.0		
				[* =		



JO b

P10.37	2	P10.34 P10.36	0.0 300.0 [s]	4.00 [s]	8.7
P10.38	3		0.0 300.0 [%]	240.0 [%]	8.7
P10.39	3	P10.36 P10.38	0.0 300.0 [s]	7.00 [s]	8.7
P10.40	4		0.0 300.0 [%]	300.0 [%]	8.7
P10.41	4	P10.38 P10.40	0.0 300.0 [s]	10.00 [s]	8.7
P10.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P10.43	5	P10.40 P10.42	0.0 300.0 [s]	10.00 [s]	8.7
P10.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P10.45	6	P10.42 P10.44	0.0 300.0 [s]	10.00 [s]	8.7
P10.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P10.47	7	P10.44 P10.46	0.0 300.0 [s]	10.00 [s]	8.7
P10.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P10.49	8	P10.46 P10.48	0.0 300.0 [s]	10.00 [s]	8.7
P10.54			0.0 300.0 [%]	0.0 [%]	
P10.55		[0] [1]	0 1	0	
P10.56			0.00 300.00 [s]	3.00 [s]	
P10.57		[0] [1]	0 1	1	
P10.58			0.00 300.00 [s]	1.50 [s]	

7.10 4 P11

P11.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P11.1					
P11.2					
P11.3		[0] [1]	0 1	0	8.7
P11.6			0.00 300.00 [s]	0.00 [s]	8.7
P11.7			0.00 300.00 [s]	0.00 [s]	8.7
P11.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P11.11					
P11.13		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P11.14			0.1 10.0	1.0	8.7
P11.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P11.16	1	P11.15	0.0 300.0 [s]	3.00 [s]	8.7
P11.17	2		0.0 300.0 [%]	200.0 [%]	8.7

P11.18	2	P11.15AÊÊ	P11.17	0.0	300.0	4.00	8.7
				[s]		[s]	
P11.19	3						

P11.37	2	P11.34	P11.36	0.0 300.0 [s]	4.00 [s]	8.7
P11.38	3			0.0 300.0 [%]	240.0 [%]	8.7
P11.39	3	P11.36	P11.38	0.0 300.0 [s]	7.00 [s]	8.7
P11.40	4			0.0 300.0 [%]	300.0 [%]	8.7
P11.41	4	P11.38	P11.40	0.0 300.0 [s]	10.00 [s]	8.7
P11.42	5			0.0 300.0 [%]	300.0 [%]	8.7
P11.43	5	P11.40	P11.42	0.0 300.0 [s]	10.00 [s]	8.7
P11.44	6			0.0 300.0 [%]	300.0 [%]	8.7
P11.45	6	P11.42	P11.44	0.0 300.0 [s]	10.00 [s]	8.7
P11.46	7			0.0 300.0 [%]	300.0 [%]	8.7
P11.47	7	P11.44	P11.46	0.0 300.0 [s]	10.00 [s]	8.7
P11.48	8			0.0 300.0 [%]	300.0 [%]	8.7
P11.49	8	P11.46	P11.48	0.0 300.0 [s]	10.00 [s]	8.7
P11.54				0.0 300.0 [%]	0.0 [%]	
P11.55		[0] [1]		0 1	0	
P11.56				0.00 300.00 [s]	3.00 [s]	
P11.57		[0] [1]		0 1	1	
P11.58				0.00 300.00 [s]	1.50 [s]	

7.11	1	P12				
P12.0		[0]	0	1	1	8.8
		[1]				
		[0] [%]				
P12.1		[1] [Hz]	0	2	1	
		[2] [rpm]				
P12.2	1		0.0	3000.0	10.0	
P12.3	2		0.0	3000.0	20.0	
P12.4						

P12.27			0.00 2.00 [s]	0.00 [s]	8.8
P12.28			0.00 2.00 [s]	0.07 [s]	8.8
P12.29			0.00 2.00 [s]	0.07 [s]	8.8
P12.32			0.0 20.0 [%]	0.0 [%]	8.8
P12.33			0.0 20.0 [%]	0.0 [%]	8.8
P12.34			0.00 2.00 [s]	0.00 [s]	8.8
P12.35			0.00 2.00 [s]	0.00 [s]	8.8
P12.36			0.00 2.00 [s]	0.50 [s]	8.8
P12.37			0.00 2.00 [s]	0.50 [s]	8.8

7.12 2 P13

P13.0		[0] [1]	0 1	1	8.8
P13.1		[0] [%] [1] [Hz] [2] [rpm]	0 2	1	
P13.2	1		0.0 3000.0	10.0	
P13.3	2		0.0 3000.0	20.0	
P13.4	3		0.0 3000.0	35.0	
P13.5	4		0.0 3000.0	50.0	
P13.6	5		0.0 3000.0	50.0	
P13.7	6		0.0 3000.0	50.0	
P13.8	7		0.0 3000.0	50.0	
P13.9	8		0.0 3000.0	50.0	
P13.10	9		0.0 3000.0	50.0	

P13.11	10		0.0 3000.0	50.0	
P13.12	11		0.0 3000.0	50.0	
P13.13	12		0.0 3000.0	50.0	
P13.14	13		0.0 3000.0	50.0	
P13.15	14		0.0 3000.0	50.0	
P13.16	15		0.0 3000.0	50.0	
P13.17	16		0.0 3000.0	50.0	
P13.22			0.0 20.0 [%]	2.0 [%]	8.8
P13.23			0.0 20.0 [%]	0.0 [%]	8.8
P13.24			0.0 200.0 [%]	30.0 [%]	8.8
P13.25			0.0 200.0 [%]	20.0 [%]	8.8
P13.26			0.00 2.00 [s]	0.00 [s]	8.8
P13.27			0.00 2.00 [s]	0.00 [s]	8.8
P13.28			0.00 2.00 [s]	0.07 [s]	8.8
P13.29			0.00 2.00 [s]	0.07 [s]	8.8
P13.32			0.0 20.0 [%]	0.0 [%]	8.8
P13.33			0.0 20.0 [%]	0.0 [%]	8.8
P13.34			0.00 2.00 [s]	0.00 [s]	8.8
P13.35			0.00 2.00 [s]	0.00 [s]	8.8
P13.36			0.00 2.00 [s]	0.50 [s]	8.8
P13.37			0.00 2.00 [s]	0.50 [s]	8.8

7.13 3 P14

P14.0		[0] [1]	0 1	1	8.8
P14.1		[0] [%] [1] [Hz] [2] [rpm]	0 2	1	
P14.2	1		0.0 3000.0	10.0	
P14.3	2		0.0 3000.0	20.0	
P14.4	3		0.0 3000.0	35.0	
P14.5	4		0.0 3000.0	50.0	
P14.6	5		0.0 3000.0	50.0	
P14.7	6		0.0 3000.0	50.0	
P14.8	7		0.0 3000.0	50.0	
P14.9	8		0.0 3000.0	50.0	
P14.10	9		0.0 3000.0	50.0	
P14.11	10		0.0 3000.0	50.0	
P14.12	11		0.0 3000.0	50.0	
P14.13	12		0.0 3000.0	50.0	
P14.14	13		0.0 3000.0	50.0	
P14.15	14		0.0 3000.0	50.0	
P14.16	15		0.0 3000.0	50.0	
P14.17	16		0.0 3000.0	50.0	
P14.22			0.0 20.0 [%]	2.0 [%]	8.8
P14.23			0.0 20.0 [%]	0.0 [%]	8.8
P14.24			0.0 200.0 [%]	30.0 [%]	8.8
P14.25			0.0 200.0 [%]	20.0 [%]	8.8
P14.26			0.00 2.00 [s]	0.00 [s]	8.8

P15.11	10		0.0 3000.0	50.0	
P15.12	11		0.0 3000.0	50.0	
P15.13	12		0.0 3000.0	50.0	
P15.14	13		0.0 3000.0	50.0	
P15.15	14		0.0 3000.0	50.0	
P15.16	15		0.0 3000.0	50.0	
P15.17	16		0.0 3000.0	50.0	
P15.22			0.0 20.0 [%]	2.0 [%]	8.8
P15.23			0.0 20.0 [%]	0.0 [%]	8.8
P15.24			0.0 200.0 [%]	30.0 [%]	8.8
P15.25			0.0 200.0 [%]	20.0 [%]	8.8
P15.26			0.00 2.00 [s]	0.00 [s]	8.8
P15.27			0.00 2.00 [s]	0.00 [s]	8.8
P15.28			0.00 2.00 [s]	0.07 [s]	8.8
P15.29			0.00 2.00 [s]	0.07 [s]	8.8
P15.32			0.0 20.0 [%]	0.0 [%]	8.8
P15.33			0.0 20.0 [%]	0.0 [%]	8.8
P15.34			0.00 2.00 [s]	0.00 [s]	8.8
P15.35			0.00 2.00 [s]	0.00 [s]	8.8
P15.36			0.00 2.00 [s]	0.50 [s]	8.8
P15.37			0.00 2.00 [s]	0.50 [s]	8.8

7.15 1 V/F P16

P16.0			560 760 [V]	690 [V]	
P16.2			0.0 3000.0 [kW]	[kW]	
P16.3			0 700 [V]	690 [V]	
P16.4			0.0 3000.0 [A]	[A]	
P16.5			0.0 300.0 [Hz]	50.0 [Hz]	
P16.6			0 6000 [rpm]	1465 [rpm]	
P16.7			2 12 [pole]	4 [pole]	8.9
P16.9			0 7200 [rpm]	1500 [rpm]	8.9
P16.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P16.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P16.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P16.15		[0] [1]	0 1	0	8.9
P16.16			2 500 [ms]	500 [ms]	
P16.17	V/F	[0] [1]	0 1	0	
P16.18			10 1000 [ms]	200 [ms]	
P16.19		[0] [1]	0 1	0	

P16.22			0.00 100.00 [s]	0.00 [s]	8.9
P16.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P16.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P16.25			0.0 120.0 [%]	100.0 [%]	
P16.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P16.27			0.0 200.0 [%]	100.0 [%]	8.9
P16.30			0.0 100.0 [%]	0.0 [%]	8.9
P16.33	V/F	V/F	0 6	2	8.9
P16.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P16.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P16.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	
P16.37	V/F 2		0.0 125.0 [%]	100.0 [%]	
P16.38	V/F 3		0.0 300.0 [Hz]	50.0 [Hz]	
P16.39	V/F 3		0.0 125.0 [%]	100.0 [%]	
P16.40	V/F 4		0.0 300.0 [Hz]	50.0 [Hz]	
P16.41	V/F 4		0.0 125.0 [%]	100.0 [%]	
P16.42	V/F 5		0.0 300.0 [Hz]	50.0 [Hz]	
P16.43	V/F 5		0.0 125.0 [%]	100.0 [%]	
P16.44	V/F 6		0.0 300.0 [Hz]	50.0 [Hz]	
P16.45	V/F 6		0.0 125.0 [%]	100.0 [%]	
P16.46	V/F @		0 300	0	
P16.47	@		0 300	0	

P16.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	
P16.49	@		0 300	0	
P16.50			0.00 300.00 [s]	0.00 [s]	8.9
P16.51			0.0 150.0 [%]	70.0 [%]	8.9
P16.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P16.54			0.00 300.00 [s]	0.00 [s]	8.9
P16.55			0.0 150.0 [%]	75.0 [%]	8.9
P16.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P16.59			0.0 1000.0 [%]	100.0 [%]	
P16.60			0.0 1000.0 [%]	100.0 [%]	
P16.61			0.0 1000.0 [%]	100.0 [%]	
P16.62			0.0 1000.0 [%]	100.0 [%]	
P16.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P16.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P16.67			0.0 1000.0 [%]	100.0 [%]	
P16.68			0.0 1000.0 [%]	100.0 [%]	
P16.69			0.0 1000.0 [%]	100.0 [%]	
P16.70			0.0 1000.0 [%]	100.0 [%]	

7.16 2 V/F P17

P17.0			560 760 [V]	690 [V]	
P17.2			0.0 3000.0 [kW]	[kW]	
P17.3			0 700 [V]	690 [V]	
P17.4			0.0 3000.0 [A]	[A]	
P17.5			0.0 300.0 [Hz]	50.0 [Hz]	
P17.6			0 6000 [rpm]	1465 [rpm]	
P17.7			2 12 [pole]	4 [pole]	8.9
P17.9			0 7200 [rpm]	1500 [rpm]	8.9
P17.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P17.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P17.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P17.15		[0] [1]	0 1	0	8.9
P17.16			2 500 [ms]	500 [ms]	
P17.17	V/F	[0] [1]	0 1	0	
P17.18			10 1000 [ms]	200 [ms]	
P17.19		[0] [1]	0 1	0	

P17.22			0.00 100.00 [s]	0.00 [s]	8.9
P17.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P17.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P17.25			0.0 120.0 [%]	100.0 [%]	
P17.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P17.27			0.0 200.0 [%]	100.0 [%]	8.9
P17.30			0.0 100.0 [%]	0.0 [%]	8.9
P17.33	V/F	V/F	0 6	2	8.9
P17.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P17.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P17.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	
P17.37	V/F 2		0.0 125.0 [%]	100.0 [%]	
P17.38	V/F 3		0.0 300.0 [Hz]	50.0 [Hz]	
P17.39	V/F 3		0.0 125.0 [%]	100.0 [%]	
P17.40	V/F 4		0.0 300.0 [Hz]	50.0 [Hz]	
P17.41	V/F 4		0.0 125.0 [%]	100.0 [%]	
P17.42	V/F 5		0.0 300.0 [Hz]	50.0 [Hz]	
P17.43	V/F 5		0.0 125.0 [%]	100.0 [%]	
P17.44	V/F 6		0.0 300.0 [Hz]	50.0 [Hz]	
P17.45	V/F 6		0.0 125.0 [%]	100.0 [%]	
P17.46	V/F @		0 300	0	
P17.47	@		0 300	0	

P17.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	
P17.49	@		0 300	0	
P17.50			0.00 300.00 [s]	0.00 [s]	8.9
P17.51			0.0 150.0 [%]	70.0 [%]	8.9
P17.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P17.54			0.00 300.00 [s]	0.00 [s]	8.9
P17.55			0.0 150.0 [%]	75.0 [%]	8.9
P17.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P17.59			0.0 1000.0 [%]	100.0 [%]	
P17.60			0.0 1000.0 [%]	100.0 [%]	
P17.61			0.0 1000.0 [%]	100.0 [%]	
P17.62			0.0 1000.0 [%]	100.0 [%]	
P17.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P17.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P17.67			0.0 1000.0 [%]	100.0 [%]	
P17.68			0.0 1000.0 [%]	100.0 [%]	
P17.69			0.0 1000.0 [%]	100.0 [%]	
P17.70			0.0 1000.0 [%]	100.0 [%]	

7.17 3 V/F P18

P18.0			560 760 [V]	690 [V]	
P18.2			0.0 3000.0 [kW]	[kW]	
P18.3			0 700 [V]	690 [V]	
P18.4			0.0 3000.0 [A]	[A]	
P18.5			0.0 300.0 [Hz]	50.0 [Hz]	
P18.6			0 6000 [rpm]	1465 [rpm]	
P18.7			2 12 [pole]	4 [pole]	8.9
P18.9			0 7200 [rpm]	1500 [rpm]	8.9
P18.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P18.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P18.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P18.15		[0] [1]	0 1	0	8.9
P18.16			2 500 [ms]	500 [ms]	
P18.17	V/F	[0] [1]	0 1	0	
P18.18			10 1000 [ms]	200 [ms]	
P18.19		[0] [1]	0 1	0	

P18.22			0.00 100.00 [s]	0.00 [s]	8.9
P18.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P18.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P18.25			0.0 120.0 [%]	100.0 [%]	
P18.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P18.27			0.0 200.0 [%]	100.0 [%]	8.9
P18.30			0.0 100.0 [%]	0.0 [%]	8.9
P18.33	V/F	V/F	0 6	2	8.9
P18.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P18.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P18.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	
P18.37	V/F 2		0.0 125.0 [%]	100.0 [%]	
P18.38	V/F 3		0.0 300.0 [Hz]	50.0 [Hz]	
P18.39	V/F 3		0.0 125.0 [%]	100.0 [%]	
P18.40	V/F 4		0.0 300.0 [Hz]	50.0 [Hz]	
P18.41	V/F 4		0.0 125.0 [%]	100.0 [%]	
P18.42	V/F 5		0.0 300.0 [Hz]	50.0 [Hz]	
P18.43	V/F 5		0.0 125.0 [%]	100.0 [%]	
P18.44	V/F 6		0.0 300.0 [Hz]	50.0 [Hz]	
P18.45	V/F 6		0.0 125.0 [%]	100.0 [%]	
P18.46	V/F @		0 300	0	
P18.47	@		0 300	0	

P18.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	
P18.49	@		0 300	0	
P18.50			0.00 300.00 [s]	0.00 [s]	8.9
P18.51			0.0 150.0 [%]	70.0 [%]	8.9
P18.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P18.54			0.00 300.00 [s]	0.00 [s]	8.9
P18.55			0.0 150.0 [%]	75.0 [%]	8.9
P18.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P18.59			0.0 1000.0 [%]	100.0 [%]	
P18.60			0.0 1000.0 [%]	100.0 [%]	
P18.61			0.0 1000.0 [%]	100.0 [%]	
P18.62			0.0 1000.0 [%]	100.0 [%]	
P18.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P18.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P18.67			0.0 1000.0 [%]	100.0 [%]	
P18.68			0.0 1000.0 [%]	100.0 [%]	
P18.69			0.0 1000.0 [%]	100.0 [%]	
P18.70			0.0 1000.0 [%]	100.0 [%]	

7.18 4 V/F P19

P19.0			560 760 [V]	690 [V]	
P19.2			0.0 3000.0 [kW]	[kW]	
P19.3			0 700 [V]	690 [V]	
P19.4			0.0 3000.0 [A]	[A]	
P19.5			0.0 300.0 [Hz]	50.0 [Hz]	
P19.6			0 6000 [rpm]	1465 [rpm]	
P19.7			2 12 [pole]	4 [pole]	8.9
P19.9			0 7200 [rpm]	1500 [rpm]	8.9
P19.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P19.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P19.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P19.15		[0] [1]	0 1	0	8.9
P19.16			2 500 [ms]	500 [ms]	
P19.17	V/F	[0] [1]	0 1	0	
P19.18			10 1000 [ms]	200 [ms]	
P19.19		[0] [1]	0 1	0	

P19.22			0.00 100.00	0.00	
			[s]	[s]	8.9
P19.23		V/F	0.00 300.00	0.00	
			[Hz]	[Hz]	
P19.24		V/F	0.00 300.00	50.00	
			[Hz]	[Hz]	
P19.25			0.0 120.0	100.0	
			[%]	[%]	
P19.26	V/F	V/F	0.00 10.00	0.75	8.9
			[%]	[%]	
P19.27			0.0 200.0	100.0	8.9
			[%]	[%]	
P19.30			0.0 100.0	0.0	8.9
			[%]	[%]	
P19.33	V/F	V/F	0 6	2	8.9
P19.34	V/F		0.0 300.0	5.0	
			[Hz]	[Hz]	
P19.35	V/F		0.0 12		

0

0.0

0

0

100.0

P19.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	
P19.49	@		0 300	0	
P19.50			0.00 300.00 [s]	0.00 [s]	8.9
P19.51			0.0 150.0 [%]	70.0 [%]	8.9
P19.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P19.54			0.00 300.00 [s]	0.00 [s]	8.9
P19.55			0.0 150.0 [%]	75.0 [%]	8.9
P19.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P19.59			0.0 1000.0 [%]	100.0 [%]	
P19.60			0.0 1000.0 [%]	100.0 [%]	
P19.61			0.0 1000.0 [%]	100.0 [%]	
P19.62			0.0 1000.0 [%]	100.0 [%]	
P19.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P19.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P19.67			0.0 1000.0 [%]	100.0 [%]	
P19.68			0.0 1000.0 [%]	100.0 [%]	
P19.69			0.0 1000.0 [%]	100.0 [%]	
P19.70			0.0 1000.0 [%]	100.0 [%]	

7.19 1 P20

P20.0	[0]	0	1	0	8.10
	[1]				
	[0]				
	[1]	1			
	[2]	2			
P20.1	[3]				
	[4]	P20.3	0	7	0
	[5]DP				
	[6]MODBUS				
	[7]				
P20.2			0	7	0
P20.3			-300.0	300.0	0.0
			[%]		[%]
P20.4	@		0		

3000 810 Q

[] Q

P20.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P20.14		1	0 60000	1024	
P20.15		[0] [1]	0 1	0	8.10
P20.16			0.0 300.0 [%]	100.0 [%]	
P20.17			0.0 300.0 [%]	100.0 [%]	
P20.18			0.0 300.0 [%]	0.0 [%]	
P20.19			0.0 300.0 [%]	0.0 [%]	
P20.20		[0] [1]	0 1	0	
P20.21		[0] [1]	0 1	0	
P20.22			0.0 300.0 [%]	160.0 [%]	
P20.23			0.0 200.0 [%]	20.0 [%]	
P20.24			0.0 300.0 [%]	100.0 [%]	
P20.25			0.0 200.0 [%]	100.0 [%]	
P20.26			0.0 1000.0 [%]	0.0 [%]	8.10
P20.27			0.00 15.00 [%]	2.00 [%]	8.10
P20.28		[0] P20.16 P20.17 [1] [2] [3]DP	0 3	0	
P20.30		[0] P20.32 [1] 1 [2] 2 [3]	P20.31 0 3	0	

P20.31			0.0 100.0 [%]	5.0 [%]	
P20.32			0.0 100.0 [%]	5.0 [%]	
P20.34		[0] [1]	0 1	0	8.10
P20.35			0.0 100.0 [s]	0.0 [s]	
P20.36			50.0 150.0 [%]	110.0 [%]	
P20.37			0.0 150.0 [%]	100.0 [%]	8.10
P20.38			0.0 100.0 [%]	25.0 [%]	8.10
P20.39			0.0 120.0 [%]	100.0 [%]	8.10
P20.40			0.0 150.0 [%]	100.0 [%]	8.10
P20.41			0.0 150.0 [%]	135.0 [%]	
P20.42		[0] [1]	0 1	1	
P20.43			25 1000 [ms]	75 [ms]	
P20.44			25 1000 [ms]	250 [ms]	
P20.45			0.0 100.0 [%]	22.0 [%]	
P20.46			0.0 100.0 [%]	18.0 [%]	
P20.47			0.0 200.0 [%]	92.0 [%]	
P20.48			0.0 200.0 [%]	87.0 [%]	
P20.49			0.0 150.0 [%]	100.0 [%]	
P20.51			0.0 1000.0 [%]	100.0 [%]	
P20.52			0.0 1000.0 [%]	100.0 [%]	

P20.53	Kp		0.0	1000.0	100.0	
				[%]	[%]	
P20.54	Ki		0.0	1000.0	100.0	
				[%]	[%]	
P20.55			0.0	1000.0	100.0	8.10
				[%]	[%]	
P20.56			0.0	1000.0	100.0	8.10
				[%]	[%]	
P20.57		[0]				
		[1]	0	1%		

P20.77	2	2	90.0 110.0 [%]	100.0 [%]	
P20.78			0.00 650.00 [mOhm]	0.00 [mOhm]	
P20.79			0.00 65.50 [mH]	0.000 [mH]	
P20.80	1	1	0.800 1.350	1.140	
P20.81	2	2	0.800 1.350	0.940	
P20.82	3	3	0.800 1.350	1.080	
P20.83	4	4	0.800 1.350	0.950	
P20.84			0.00 655.00 [mH]	0.00 [mH]	
P20.85	85%	85%	40.0 150.0 [%]	108.0 [%]	
P20.86	87.5%	87.5%	40.0 150.0 [%]	106.5 [%]	
P20.87	90%	90%	40.0 150.0 [%]	105.0 [%]	
P20.88	92.5%	92.5%	40.0 150.0 [%]	103.5 [%]	
P20.89	95%	95%	40.0 150.0 [%]	102.0 [%]	
P20.90	102.5%	102.5%	40.0 150.0 [%]	99.0 [%]	
P20.91	105%	105%	40.0 150.0 [%]	96.5 [%]	
P20.92	110%	110%	40.0 150.0 [%]	93.0 [%]	
P20.93	115%	115%	40.0 150.0 [%]	88.5 [%]	
P20.94	120%	120%	40.0 150.0 [%]	83.0 [%]	
P20.95	125%	125%	40.0 150.0 [%]	77.0 [%]	
P20.96	130%	130%	40.0 150.0 [%]	70.5 [%]	
P20.97	135%	135%	40.0 150.0 [%]	63.5 [%]	
P20.98		()	0.01 300.00 [s]	0.75 [s]	
P20.99			0.00 10.00 [%]	0.00 [%]	

7.20 2 P21

P21.0		[0] [1]	0 1	0	8.10
P21.1		[0] [1] 1 [2] 2 [3] [4] P21.3 [5]DP [6]MODBUS [7]	0 7	0	8.10
P21.2			0 7	0	
P21.3			-300.0 300.0 [%]	0.0 [%]	8.10
P21.4	@		0 300	0	
P21.5			0 1000 [ms]	0 [ms]	
P21.6			0.0 200.0 [%]	100.0 [%]	8.10
P21.7		[0] [1] P21.8 P21.9 [2] 1 [3] 2 [4] [5]DP [6]MODBUS [7]	0 7	0	8.10
P21.8		P21.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P21.9		P21.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P21.10			0 300	0	
P21.11			0 1000 [ms]	0 [ms]	
P21.13			20.0 500.0 [ms]	100.0 [ms]	8.10

P21.14		1	0 60000	1024	
P21.15		[0] [1]	0 1	0	8.10
P21.16			0.0 300.0 [%]	100.0 [%]	
P21.17			0.0 300.0 [%]	100.0 [%]	
P21.18			0.0 300.0 [%]	0.0 [%]	
P21.19			0.0 300.0 [%]	0.0 [%]	
P21.20		[0] [1]	0 1	0	
P21.21		[0] [1]	0 1	0	
P21.22			0.0 300.0 [%]	160.0 [%]	
P21.23			0.0 200.0 [%]	20.0 [%]	
P21.24			0.0 300.0 [%]	100.0 [%]	
P21.25			0.0 200.0 [%]	100.0 [%]	
P21.26			0.0 1000.0 [%]	0.0 [%]	8.10
P21.27			0.00 15.00 [%]	2.00 [%]	8.10
P21.28		[0] P21.16 P21.17 [1] [2] [3]DP	0 3	0	
P21.30		[0] P21.32 [1] 1 [2] 2 [3]	P21.31 0 3	0	
P21.31			0.0 100.0 [%]	5.0 [%]	

P21.32		0.0 100.0 [%]	5.0 [%]	
P21.34	[0] [1]	0 1	0	8.10
P21.35		0.0 100.0 [s]	0.0 [s]	
P21.36		50.0 150.0 [%]	110.0 [%]	
P21.37		0.0 150.0 [%]	100.0 [%]	8.10
P21.38		0.0 100.0 [%]	25.0 [%]	8.10
P21.39		0.0 120.0 [%]	100.0 [%]	8.10
P21.40		0.0 150.0 [%]	100.0 [%]	8.10
P21.41		0.0 150.0 [%]	135.0 [%]	
P21.42	[0] [1]	0 1	1	
P21.43		25 1000 [ms]	75 [ms]	
P21.44				

[°] [

[3(' w .. 0

P21.54

Ki

0.0 1000.0 100.0
[%] [%]

P21.55

0.0 1000.0 100.0 8.10
[%] [%]

P21.56

0.0 1000.0 100.0 8.10
[%] [%]

P21.57

[0]
[1]

0 1 0 8.10

P21.58

0.0 125.0 100.0 8.10
[%] [%]

P21.59

1.0 25.0 2.5 8.10
[%] [%]

P21.60 DROOP

0 DROOP

0.0 100.0 0.0 8.10
[%] [%]

P21.61 DROOP

DROOP

30 2000 50 8.10
[ms] [ms]

P21.62

0.0 1000.0 100.0 8.10
[%] [%]

P21.63

0.0 1000.0 100.0 8.10
[%] [%]

P21.66

1

1

0.0 1000.0 100.0
[%] [%]

P21.67

2

2

J

J0

D

[]

[]

0

P21.78			0.00 650.00 [mOhm]	0.00 [mOhm]	
P21.79			0.00 65.50 [mH]	0.000 [mH]	
P21.80	1	1	0.800 1.350	1.140	
P21.81	2	2	0.800 1.350	0.940	
P21.82	3	3	0.800 1.350	1.080	
P21.83	4	4	0.800 1.350	0.950	
P21.84			0.00 655.00 [mH]	0.00 [mH]	
P21.85	85%	85%	40.0 150.0 [%]	108.0 [%]	
P21.86	87.5%	87.5%	40.0 150.0 [%]	106.5 [%]	
P21.87	90%	90%	40.0 150.0 [%]	105.0 [%]	
P21.88	92.5%	92.5%	40.0 150.0 [%]	103.5 [%]	
P21.89	95%	95%	40.0 150.0 [%]	102.0 [%]	
P21.90	102.5%	102.5%	40.0 150.0 [%]	99.0 [%]	
P21.91	105%	105%	40.0 150.0 [%]	96.5 [%]	
P21.92	110%	110%	40.0 150.0 [%]	93.0 [%]	
P21.93	115%	115%	40.0 150.0 [%]	88.5 [%]	
P21.94	120%	120%	40.0 150.0 [%]	83.0 [%]	
P21.95	125%	125%	40.0 150.0 [%]	77.0 [%]	
P21.96	130%	130%	40.0 150.0 [%]	70.5 [%]	
P21.97	135%	135%	40.0 150.0 [%]	63.5 [%]	
P21.98		()	0.01 300.00 [s]	0.75 [s]	
P21.99			0.00 10.00 [%]	0.00 [%]	

7.21 3 P22

P22.0		[0]		0	1	0	8.10
		[1]					
		[0]					
		[1]	1				
		[2]	2				
P22.1		[3]		0	7	0	8.10
		[4]	P22.3				
		[5]DP					
		[6]MODBUS					
		[7]					
P22.2				0	7	0	
P22.3				-300.0	300.0	0.0	8.10
				[%]		[%]	
P22.4	@			0	300	0	
P22.5				0	1000	0	
				[ms]		[ms]	
P22.6				0.0	200.0	100.0	8.10
				[%]		[%]	
		[0]					
		[1]	P22.8				
		P22.9					
		[2]	1				
P22.7		[3]	2	0	7	0	8.10
		[4]					
		[5]DP					
		[6]MODBUS					
		[7]					
P22.8		P22.7	[1]	0.0	300.0	200.0	8.10
				[%]		[%]	
P22.9		P22.7	[1]	0.0	300.0	200.0	8.10
				[%]		[%]	
P22.10				0	300	0	
P22.11				0	1000	0	
				[ms]		[ms]	

P22.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P22.14		1	0 60000	1024	
P22.15		[0] [1]	0 1	0	8.10
P22.16			0.0 300.0 [%]	100.0 [%]	
P22.17			0.0 300.0 [%]	100.0 [%]	
P22.18			0.0 300.0 [%]	0.0 [%]	
P22.19			0.0 300.0 [%]	0.0 [%]	
P22.20		[0] [1]	0 1	0	
P22.21		[0] [1]	0 1	0	
P22.22			0.0 300.0 [%]	160.0 [%]	
P22.23			0.0 200.0 [%]	20.0 [%]	
P22.24			0.0 300.0 [%]	100.0 [%]	
P22.25			0.0 200.0 [%]	100.0 [%]	
P22.26			0.0 1000.0 [%]	0.0 [%]	8.10
P22.27			0.00 15.00 [%]	2.00 [%]	8.10
P22.28		[0] P22.16 P22.17 [1] [2] [3]DP	0 3	0	
P22.30		[0] P22.32 [1] 1 [2] 2 [3]	P22.31 0 3	0	

P22.31			0.0 100.0 [%]	5.0 [%]	
P22.32			0.0 100.0 [%]	5.0 [%]	
P22.34		[0] [1]	0 1	0	8.10
P22.35			0.0 100.0 [s]	0.0 [s]	
P22.36			50.0 150.0 [%]	110.0 [%]	
P22.37			0.0 150.0 [%]	100.0 [%]	8.10
P22.38			0.0 100.0 [%]	25.0 [%]	8.10
P22.39			0.0 120.0 [%]	100.0 [%]	8.10
P22.40			0.0 150.0 [%]	100.0 [%]	8.10
P22.41			0.0 150.0 [%]	135.0 [%]	
P22.42		[0] [1]	0 1	1	
P22.43			25 1000 [ms]	75 [ms]	
P22.44			25 1000 [ms]	250 [ms]	
P22.45			0.0 100.0 [%]	22.0 [%]	
P22.46			0.0 100.0 [%]	18.0 [%]	
P22.47			0.0 200.0 [%]	92.0 [%]	
P22.48			0.0 200.0 [%]	87.0 [%]	
P22.49			0.0 150.0 [%]	100.0 [%]	
P22.51			0.0 1000.0 [%]	100.0 [%]	
P22.52			0.0 1000.0 [%]	100.0 [%]	

P22.53	Kp		0.0 1000.0 [%]	100.0 [%]	
P22.54	Ki		0.0 1000.0 [%]	100.0 [%]	
P22.55			0.0 1000.0 [%]	100.0 [%]	8.10
P22.56			0.0 1000.0 [%]	100.0 [%]	8.10
P22.57		[0] [1]	0 1	0	8.10
P22.58			0.0 125.0 [%]	100.0 [%]	8.10
P22.59			1.0 25.0 [%]	2.5 [%]	8.10
P22.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P22.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P22.62			0.0 1000.0 [%]	100.0 [%]	8.10
P22.63			0.0 1000.0 [%]	100.0 [%]	8.10
P22.66	1	1	0.0 1000.0 [%]	100.0 [%]	
P22.67	2	2	0.0 1000.0 [%]	100.0 [%]	
P22.69			0.00 2.00 [%]	1.00 [%]	
P22.70			0.00 2.00 [%]	1.00 [%]	
P22.71		[0] [1]	0 1	0	
P22.72		[0] [1]	0 1	1	
P22.73		[0] × 1 [1] × 10	0 1	0	
P22.74			0.00 650.00 [mOhm]	0.00 [mOhm]	
P22.75			0.70 1.00	0.90	
P22.76	1	1	90.0 110.0 [%]	100.0 [%]	

P22.77	2	2	90.0 110.0 [%]	100.0 [%]	
P22.78			0.00 650.00 [mOhm]	0.00 [mOhm]	
P22.79			0.00 65.50 [mH]	0.000 [mH]	
P22.80	1	1	0.800 1.350	1.140	
P22.81	2	2	0.800 1.350	0.940	
P22.82	3	3	0.800 1.350	1.080	
P22.83	4	4	0.800 1.350	0.950	
P22.84			0.00 655.00 [mH]	0.00 [mH]	
P22.85	85%	85%	40.0 150.0 [%]	108.0 [%]	
P22.86	87.5%	87.5%	40.0 150.0 [%]	106.5 [%]	
P22.87	90%	90%	40.0 150.0 [%]	105.0 [%]	
P22.88	92.5%	92.5%	40.0 150.0 [%]	103.5 [%]	
P22.89	95%	95%	40.0 150.0 [%]	102.0 [%]	
P22.90	102.5%	102.5%	40.0 150.0 [%]	99.0 [%]	
P22.91	105%	105%	40.0 150.0 [%]	96.5 [%]	
P22.92	110%	110%	40.0 150.0 [%]	93.0 [%]	
P22.93	115%	115%	40.0 150.0 [%]	88.5 [%]	
P22.94	120%	120%	40.0 150.0 [%]	83.0 [%]	
P22.95	125%	125%	40.0 150.0 [%]	77.0 [%]	
P22.96	130%	130%	40.0 150.0 [%]	70.5 [%]	
P22.97	135%	135%	40.0 150.0 [%]	63.5 [%]	
P22.98		()	0.01 300.00 [s]	0.75 [s]	
P22.99			0.00 10.00 [%]	0.00 [%]	

7.22 4 P23

P23.0		[0]		0	1	0	8.10
		[1]					
		[0]					
		[1]	1				
		[2]	2				
P23.1		[3]		0	7	0	8.10
		[4]	P23.3				
		[5]	DP				
		[6]	MODBUS				
		[7]					
P23.2				0	7	0	
P23.3				-300.0	300.0	0.0	8.10
				[%]		[%]	
P23.4	@			0	300	0	
P23.5				0	1000	0	
				[ms]		[ms]	
P23.6				0.0	200.0	100.0	8.10
				[%]		[%]	
		[0]	UNITS OF P 6 Y P ...Y				
		[1]	30 " P23.8 o				
			P23.9				
		[2]	1				
P23.7		[3]					

P23.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P23.14		1	0 60000	1024	
P23.15		[0] [1]	0 1	0	8.10
P23.16			0.0 300.0 [%]	100.0 [%]	
P23.17			0.0 300.0 [%]	100.0 [%]	
P23.18			0.0 300.0 [%]	0.0 [%]	
P23.19			0.0 300.0 [%]	0.0 [%]	
P23.20		[0] [1]	0 1	0	
P23.21		[0] [1]	0 1	0	
P23.22			0.0 300.0 [%]	160.0 [%]	
P23.23			0.0 200.0 [%]	20.0 [%]	
P23.24			0.0 300.0 [%]	100.0 [%]	
P23.25			0.0 200.0 [%]	100.0 [%]	
P23.26			0.0 1000.0 [%]	0.0 [%]	8.10
P23.27			0.00 15.00 [%]	2.00 [%]	8.10
P23.28		[0] P23.16 P23.17 [1] [2] [3]DP	0 3	0	
P23.30		[0] P23.32 [1] 1 [2] 2 [3]	P23.31 0 3	0	

P23.31			0.0 100.0 [%]	5.0 [%]	
P23.32			0.0 100.0 [%]	5.0 [%]	
P23.34		[0] [1]	0 1	0	8.10
P23.35			0.0 100.0 [s]	0.0 [s]	
P23.36			50.0 150.0 [%]	110.0 [%]	
P23.37			0.0 150.0 [%]	100.0 [%]	8.10
P23.38			0.0 100.0 [%]	25.0 [%]	8.10
P23.39			0.0 120.0 [%]	100.0 [%]	8.10
P23.40			0.0 150.0 [%]	100.0 [%]	8.10
P23.41			0.0 150.0 [%]	135.0 [%]	
P23.42		[0] [1]	0 1	1	
P23.43			25 1000 [ms]	75 [ms]	
P23.44			25 1000 [ms]	250 [ms]	
P23.45			0.0 100.0 [%]	22.0 [%]	
P23.46			0.0 100.0 [%]	18.0 [%]	
P23.47			0.0 200.0 [%]	92.0 [%]	
P23.48			0.0 200.0 [%]	87.0 [%]	
P23.49			0.0 150.0 [%]	100.0 [%]	
P23.51			0.0 1000.0 [%]	100.0 [%]	
P23.52			0.0 1000.0 [%]	100.0 [%]	

P23.53	Kp		0.0 1000.0 [%]	100.0 [%]	
P23.54	Ki		0.0 1000.0 [%]	100.0 [%]	
P23.55			0.0 1000.0 [%]	100.0 [%]	8.10
P23.56			0.0 1000.0 [%]	100.0 [%]	8.10
P23.57		[0] [1]	0 1	0	8.10
P23.58			0.0 125.0 [%]	100.0 [%]	8.10
P23.59			1.0 25.0 [%]	2.5 [%]	8.10
P23.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P23.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P23.62			0.0 1000.0 [%]	100.0 [%]	8.10
P23.63			0.0 1000.0 [%]	100.0 [%]	8.10
P23.66	1	1	0.0 1000.0 [%]	100.0 [%]	
P23.67	2	2	0.0 1000.0 [%]	100.0 [%]	
P23.69			0.00 2.00 [%]	1.00 [%]	
P23.70			0.00 2.00 [%]	1.00 [%]	
P23.71		[0] [1]	0 1	0	
P23.72		[0] [1]	0 1	1	
P23.73		[0] × 1 [1] × 10	0 1	0	
P23.74			0.00 650.00 [mOhm]	0.00 [mOhm]	
P23.75			0.70 1.00	0.90	
P23.76	1	1	90.0 110.0 [%]	100.0 [%]	

P23.77	2		2	90.0	110.0	100.0
				[%]		[%]
P23.78				0.00	650.00	0.00
				[mOhm]		[mOhm]
P23.79				0.00	65.50	0.000
				[mH]		[mH]
P23.80	1		1	0.800	1.350	1.140
P23.81	2		2	0.800	1.350	0.940
P23.82	3		3	0.800	1.350	1.080
P23.83	4		4	0.800	1.350	0.950
P23.84				0.00	655.00	0.00
				[mH]		[mH]
P23.85	85%	85%		40.0	150.0	108.0
				[%]		[%]
P23.86	87.5%	87.5%		40.0	150.0	106.5
				[%]		[%]
P23.87	90%	90%		40.0	150.0	105.0
				[%]		[%]
P23.88 20	92.5%	92.5%		40.0	150.0	103.5
				[%]		[%]
P23.89	95%	95%		40.0	150.0	102.0
	92.5			[%]		[%]
P23.90 5%	102.	102.5%		40.0	150.0	.
				[%]		

7.23

P33

P33.0	Profibus	[0] [1]	0 1	0	
P33.1		PLC	1 255	1	
P33.2		[0]PPO 1 [1]PPO 2 [2]PPO 5 [3]GUIDE	0 3	2	
P33.3			0 16	14	
P33.4			0 16	14	
P33.5		[0] [1] [2] [3]	0 3	0	
P33.6			0 1000 [ms]	50 [ms]	
P33.7		[0] [1]	0 1	0	
P33.8			0.0 10.0 [s]	3.0 [s]	
P33.13	[W0]	7-2	0 37	0	
P33.14	[W0]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.15	[W1]	7-2	0 37	0	
P33.16	[W1]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.17	[W2]	7-2	0 37	0	

P33.18	[W2]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.19	[W3]	7-2	0 37	0	
P33.20	[W3]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.21	[W4]	7-2	0 37	1	
P33.22	[W4]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.23	[W5]	7-2	0 37	18	
P33.24	[W5]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	2	
P33.25	[W6]	7-2	0 37	21	
P33.26	[W6]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	
P33.27	[W7]	7-2	0 37	22	
P33.28	[W7]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	
P33.29	[W8]	7-2	0 37	23	
P33.30	[W8]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	

P33.31

3

P33.44	[W15]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.45	[W0]	7-3	0 48	0	
P33.46	[W0]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.47	[W1]	7-3	0 48	0	
P33.48	[W1]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.49	[W2]	7-3	0 48	0	
P33.50	[W2]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.51	[W3]	7-3	0 48	0	
P33.52	[W3]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.53	[W4]	7-3	0 48	1	

		[0] × 1		
		[1] × 10		
		[2] × 100		
P33.54		[3] × 1000	0 7	0
	[W4]	[4] × 10000		
		[5] [%] × 1		
		[6] [%] × 10		
		[7] [%] × 100		
P33.55	[W5]	7-3	0 48	19
		[0] × 1		
		[1] × 10		
		[2] × 100		
P33.56		[3] × 1000	0 7	2
	[W5]	[4] × 10000		
		[5] [%] × 1		
		[6] [%] × 10		
		[7] [%] × 100		
P33.57	[W6]	7-3	0 48	26
		[0] × 1		
		[1] × 10		
		[2] × 100		
P33.58		[3] × 1000	0 7	6
	[W6]	[4] × 10000		
		[5] [%] × 1		
		[6] [%] × 10		
		[7] [%] × 100		
P33.59	[W7]	7-3	0 48	30
		[0] × 1		
		[1] × 10		
		[2] × 100		
P33.60		[3] × 1000	0 7	1
	[W7]	[4] × 10000		
		[5] [%] × 1		
		[6] [%] × 10		
		[7] [%] × 100		
P33.6 . .				

P33.62	[W8]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.63	[W9]	7-3	0 48	13	
P33.64	[W9]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.65	[W10]	7-3	0 48	40	
P33.66	[W10]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	6	
P33.67	[W11]	7-3	0 48	0	
P33.68	[W11]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.69	[W12]	7-3	0 48	0	

P33.70	[W12]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.71	[W13]	7-3	0 48	0	
P33.72	[W13]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.73	[W14]	7-3	0 48	0	
P33.74	[W14]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.75	[W15]	7-3	0 48	0	
P33.76	[W15]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	

7-2

0	
1	0
2	1
3	2
4	3
5	4
6	[32]
7	[32]
8	32_MSW
9	32_LSW
10	
11	
12	0 @32bit
13	1 @32bit
14	2 @32bit
15	3 @32bit
16	4 @32bit
17	5 @32bit
18	[Hz]
19	[rpm]
20	[%]
21	[%]
22	[%]
23	[Hz]
24	
25	
26	1[%]
27	2[%]
28	
29	
30 37	SET_W12 19

7-3

0	
1	0
2	1
3	2
4	3
5	4
6	5
7	0 @32bit
8	1 @32bit
9	2 @32bit
10	3 @32bit
11	4 @32bit
12	5 @32bit
13	[32]
14	[32]
15	32bit_MSW
16	32bit_LSW
17	
18	
19	
20	[rpm]
21	[rpm]
22	
23	
24	
25	
26	
27	A
28	B


29	C
30	
31	
32	
33	1
34	2
35	
36	
37	
38	
39	
40	
41 48	AW22 29

B. [1]


416 (8421)

(FORWARD) (REVERSE) P12.2(1)


8.3

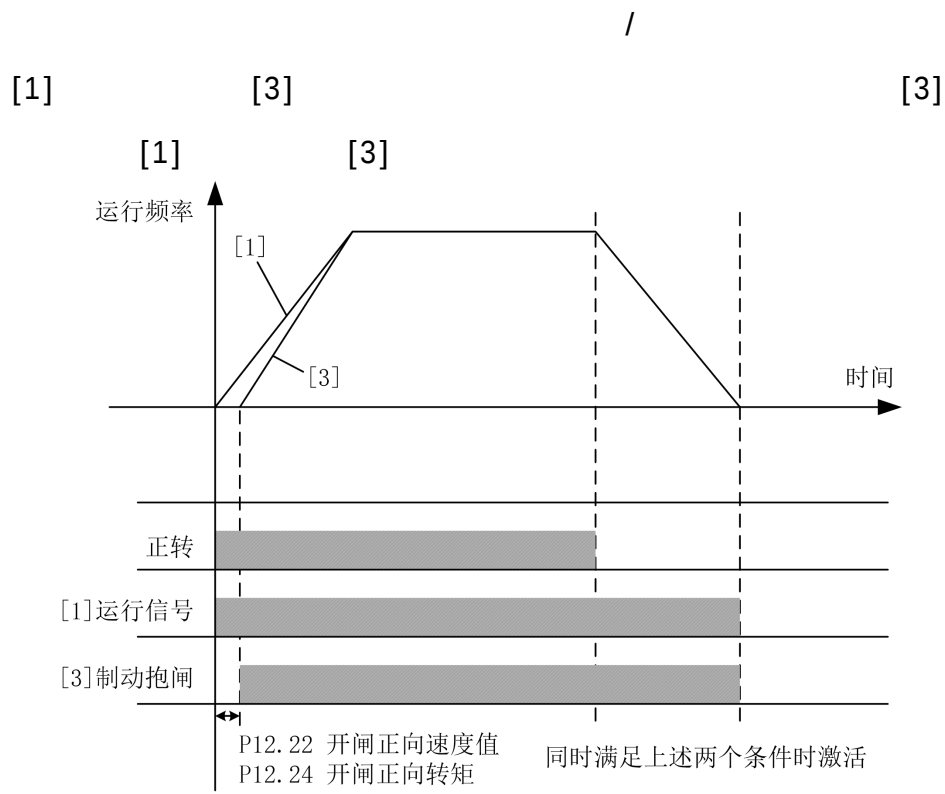


8.4

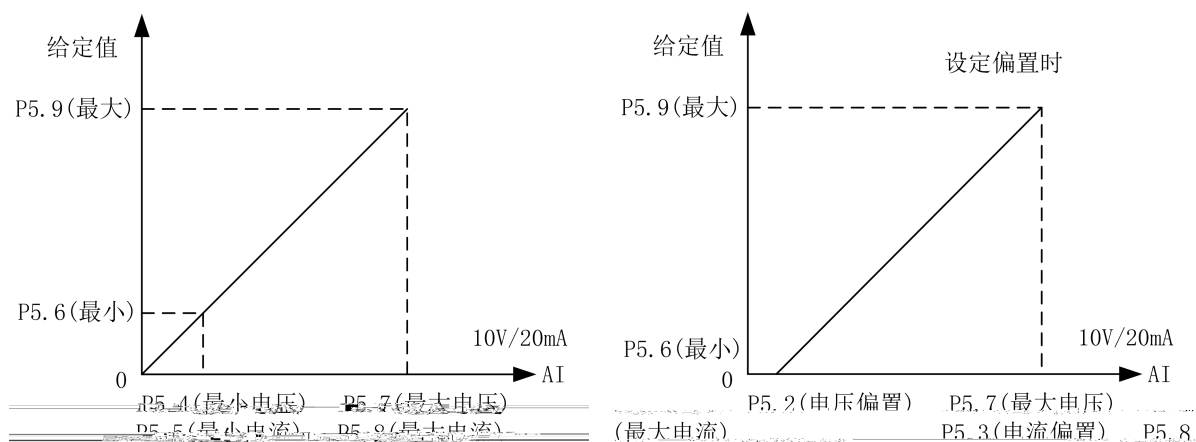

8.5

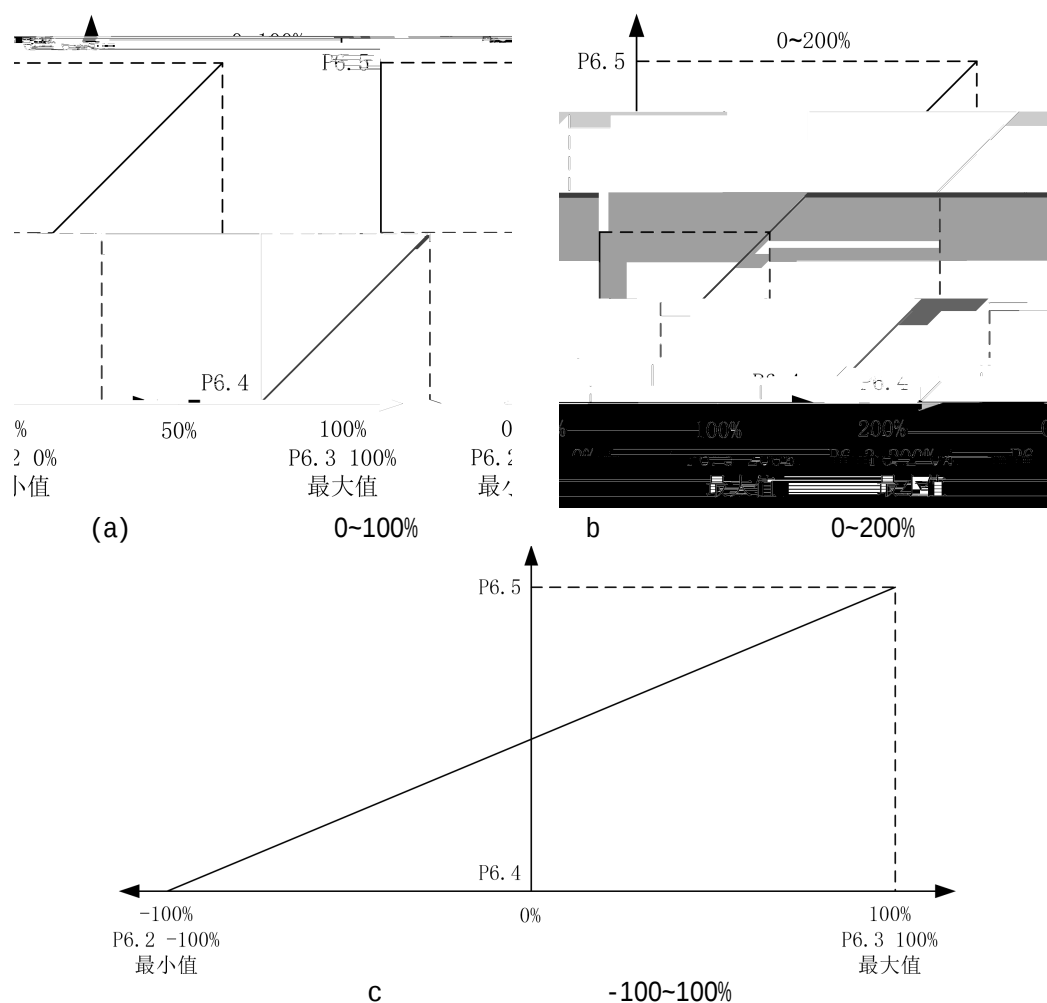

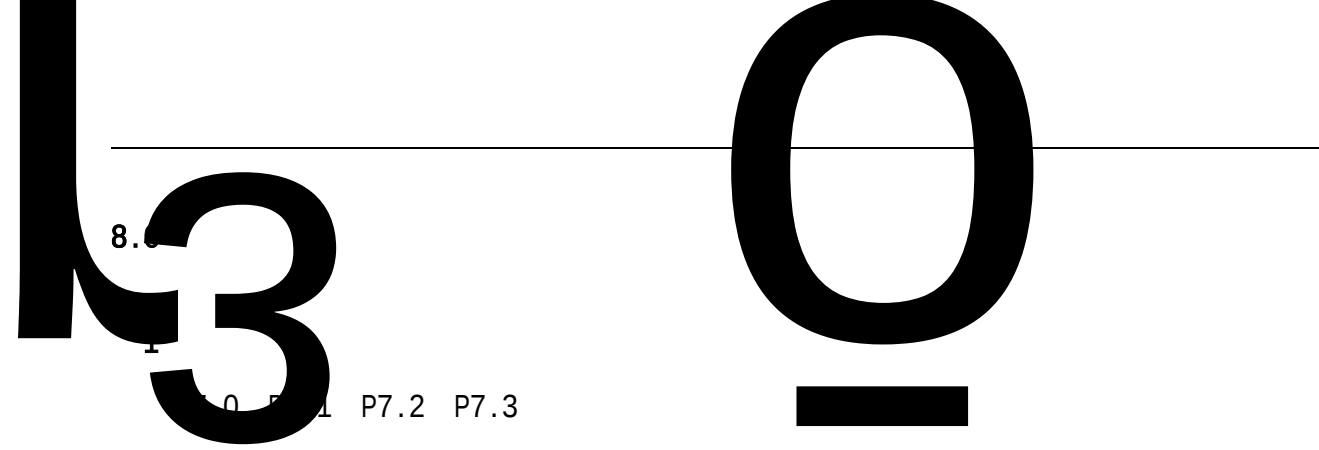

8.6

1

P7.0 P7.1 P7.2 P7.3

2

P7.4 P7.5 P7.6 P7.7

P7.4

P16.4

3

P7.8 P7.9 P7.10 P7.11

$I_a + I_b + I_c$

P16.4 $\frac{I_a + I_b + I_c}{P} > P$

4

P7.12 P7.13

P7.12

P7.13

5 \$YÖð

P7.14

IGBT

P7.14

P7.15

IGBT

7

P7.23

P16.11=1

P7.23

P7.23

P7.24 P7.26

P17.11=1 P18.11=1 P19.11=1

8

P7.31 P7.32

P16.11=2

P7.31

100%

P7.32

P7.31

P7.32


9

P7.33

P7.33

10

P7.48 P7.50

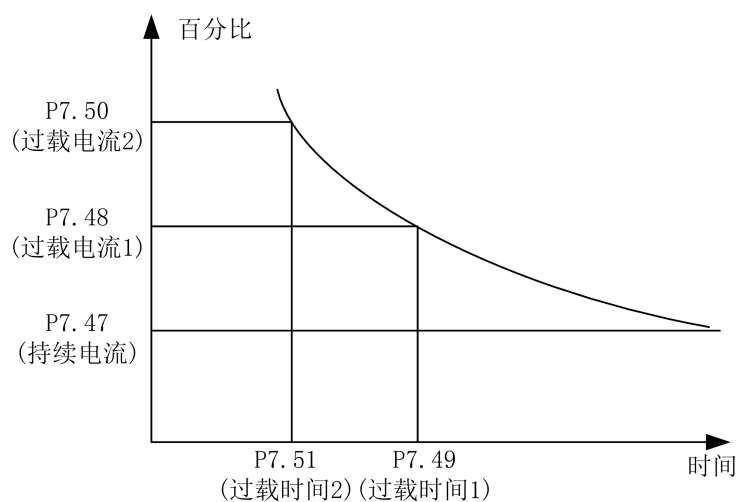


1.	1200kW	1200kW	
2.		141%	10

11

P7.64	P7.65	P7.66		HF680NLC
30kW		P7.64	1	
			P7.65	
P7.66				
P16.66 ≥ P16.65	P16.0	690V	P7.65	0V
				1068V
P7.66	20V	1088V		
		$= \sqrt{\quad + \quad + \quad}$ $= \sqrt{\quad + \quad + \quad}$		

12

P7.69	P7.70		P7.69	0
		P16.0	690V	P7.70
			0V	
1093V		$= \sqrt{\quad + \quad + \quad}$		

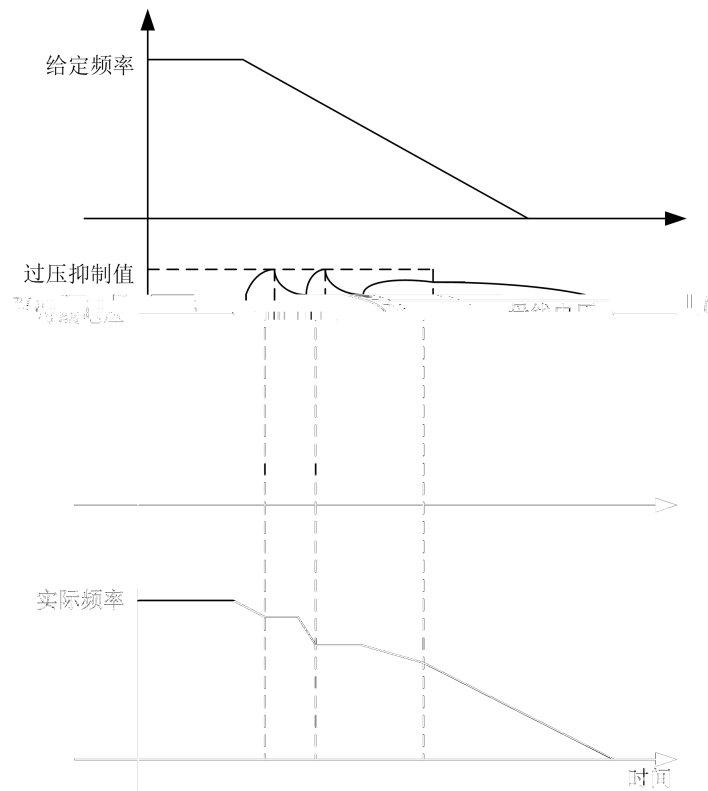

8.7

1

1.1 1

P16.11	Basic Control Function	0: V/F 1: 2: 3: 4:	0 V/F
P16.57	Flying Start CL	0-100%	75%
P16.58	Flying Start Mode	0: FWD 1: REV 2: REV-FWD 3: FWD-REV	0:FWD
P16.71	Flying Start IsFlt	0-500.0ms	0.0ms
P16.72	Flying Start FeType	0: 1 1: 2	0: 1
P16.73	Flying Start FeAdjE	0: 1:	1:
1. DI 21 2. P8.06 [] = 5.0 3.P16.11 0 V/F 4. P16.58 2 3 5. P16.71 6.P16.72 0 P16.73 1			

P17.11	Basic Control Function	0: V/F 1: 2: 3: 4:	0 V/F
P17.57	Flying Start CL	0-100%	75%
P17.58	Flying Start Mode	0: FWD 1: REV 2: REV-FWD 3: FWD-REV	0:FWD
P17.71	Flying Start IsFlt	0-500.0ms	0.0ms
P17.72	Flying Start FeType	0: 1 1: 2	0: 1
P17.73	Flying Start FeAdjE	0: 1:	1:
1. DI 21 2. P8.06 [] = 5.0 3.P17.11 0 V/F 4. P17.58 2 3 5. P17.71 6.P17.72 0 P17.73 1			

1.3 3

P18.11 Basic Control

P19.11	Basic Control Function	0: V/F 1: 2: 3: 4:	0 V/F
P19.57	Flying Start CL	0-100%	75%
P19.58	Flying Start Mode	0: FWD 1: REV 2: REV-FWD 3: FWD-REV	0:FWD
P19.71	Flying Start IsFlt	0-500.0ms	0.0ms
P19.72	Flying Start FeType	0: 1 1: 2	0: 1
P19.73	Flying Start FeAdjE	0: 1:	1:
1. DI 21 2. P8.06 [] = 5.0 3.P19.11 0 V/F 4. P19.58 2 3 5. P19.71 6.P19.72 0 P19.73 1			

2

P8.3


[0]

[1]

P8.6

P8.6

P8.7

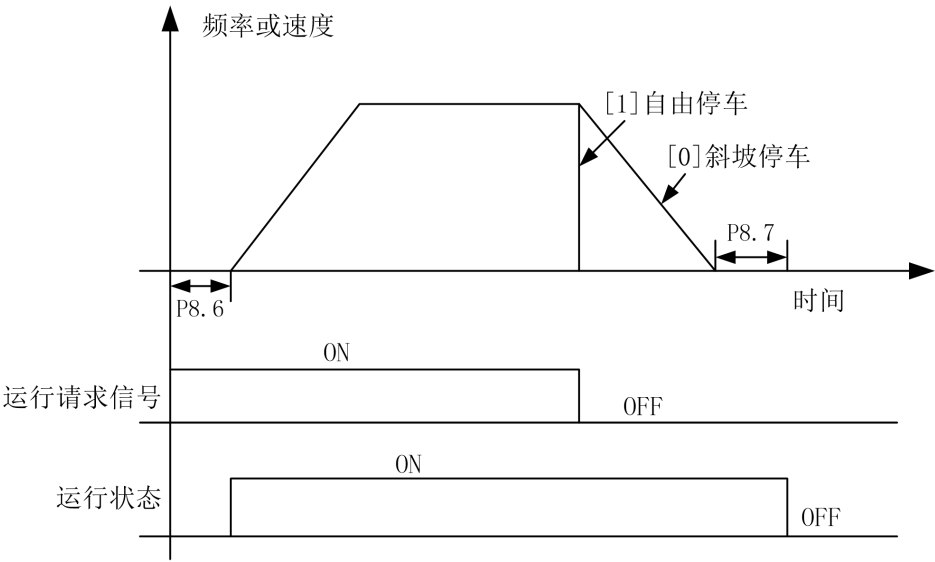


3

P8.14

P8.14


P8.33

P8.33

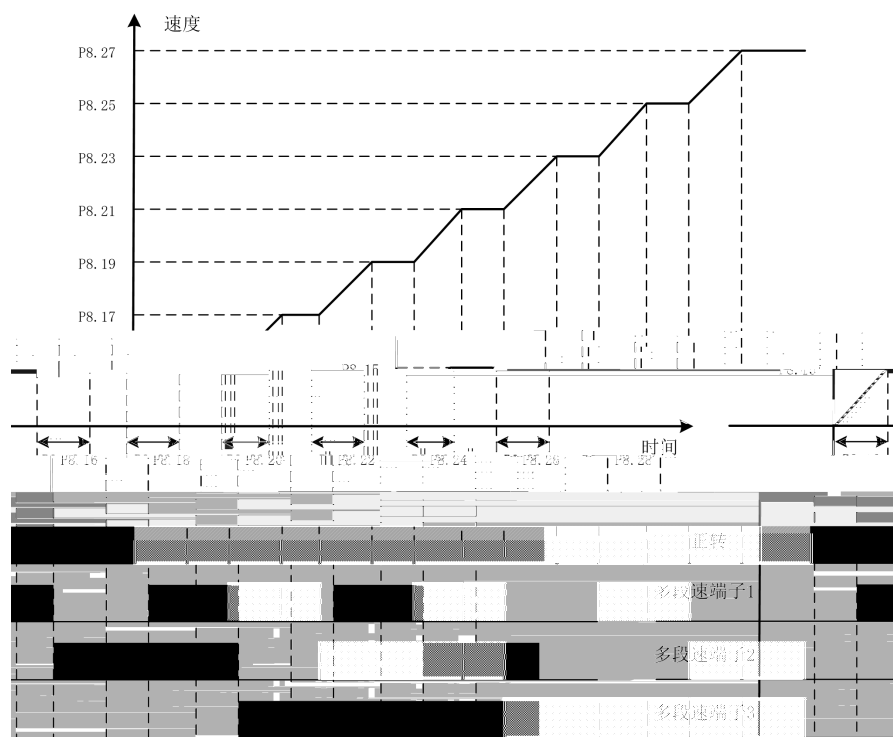

$P8.15 < P8.17 < P8.19 < P8.21 < P8.23 < P8.25 < P8.27$

P8.15	P8.17	P8.19	P8.21	P8.23	P8.25	P8.27
10%	20%	30%	50%	60%	80%	100%

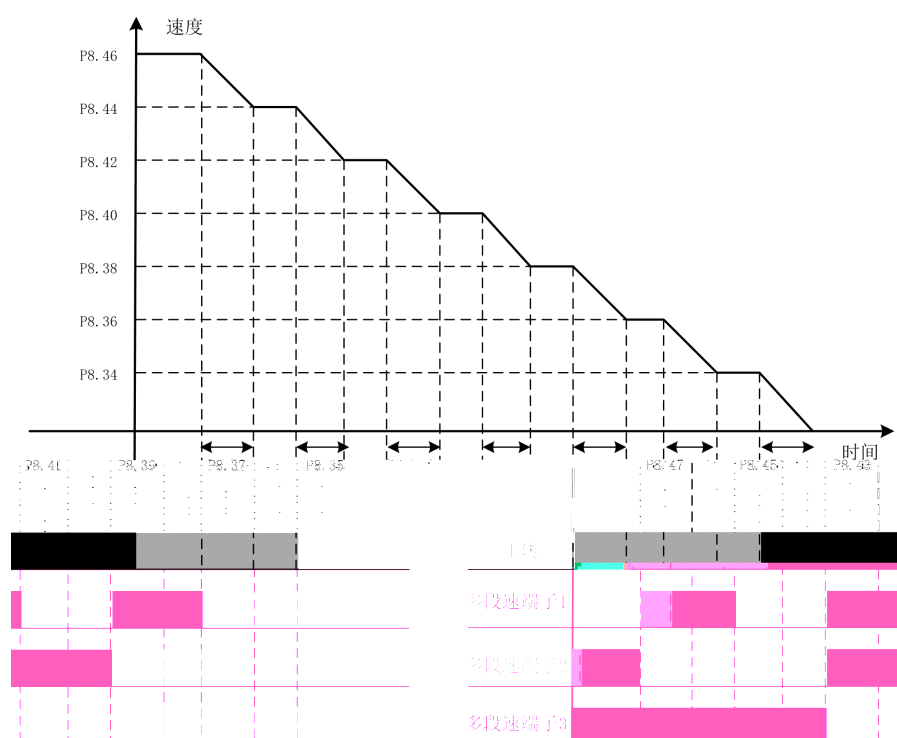

P8.34 < P8.36 < P8.38 < P8.40 < P8.42 < P8.44 < P8.46

P8.34	P8.36	P8.38	P8.40	P8.42	P8.44	P8.46
10%	20%	30%	50%	60%	80%	100%

4

PROFIBUS MODBUS

P8.13

P8.32

1 =P8.14 × P8.16 × (× 0.001)
 1 =P8.33 × P8.35 × (× 0.001)

8.8

1

P12.2 P12.17

P12.0=[1]

	1	2	3	4
1	0	0	0	0
2	1	0	0	0
3	0	1	0	0
4	1	1	0	0
5	0	0	1	0
6	1	0	1	0
7	0	1	1	0
8	1	1	1	0
9	0	0	0	1
10	1	0	0	1
11	0	1	0	1
12	1	1	0	1
13	0	0	1	1
14	1	0	1	1
15	0	1	1	1
16	1	1	1	1

0

OFF 1

ON

2

P12.22 P12.37

[3]


P12.22 P12.23

P12.24 P12.25

P12.32[] P12.33[]

P12.28 P12.29

P12.36 P12.37

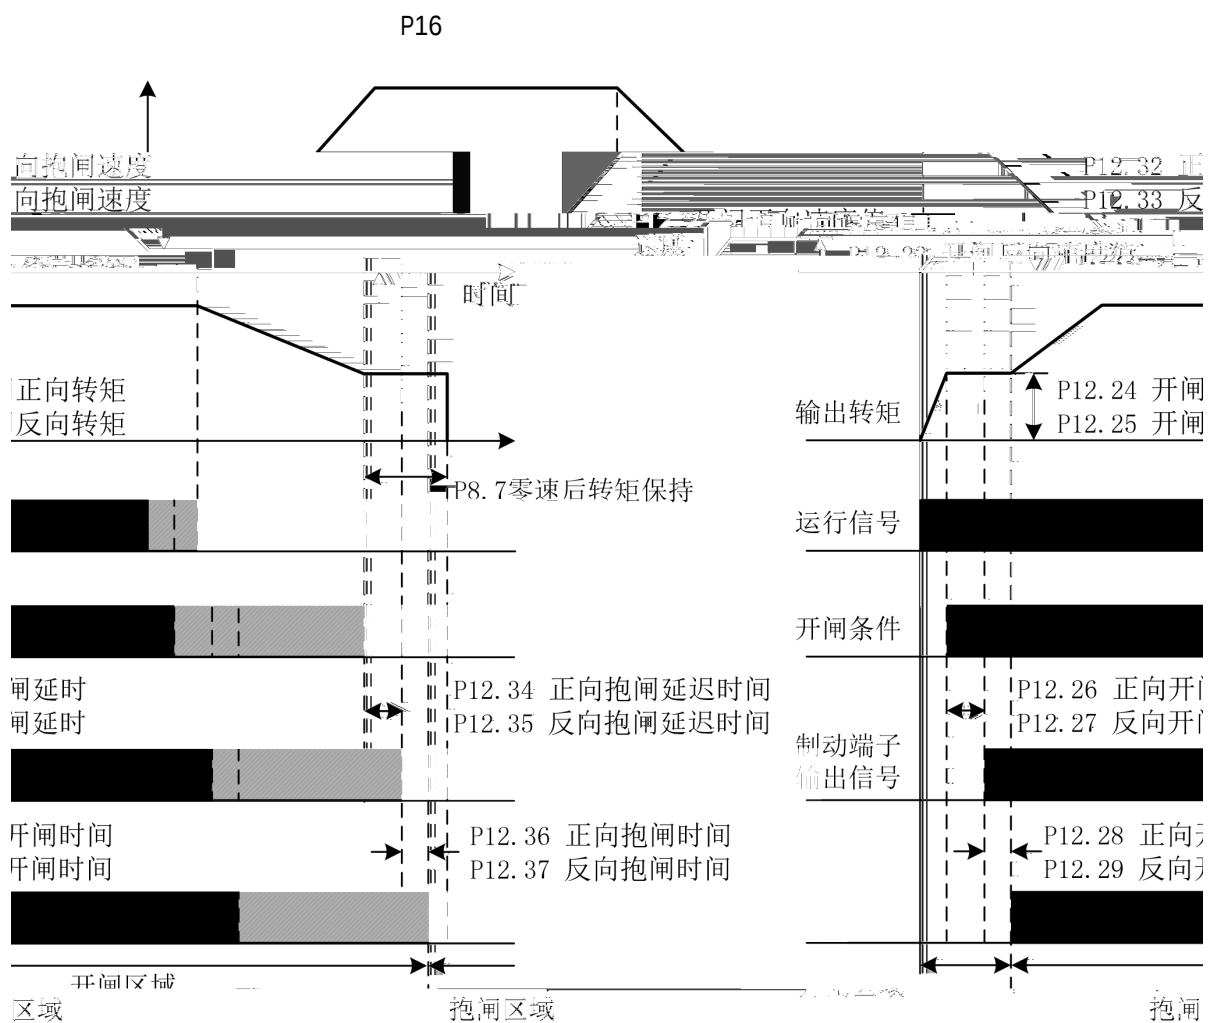

8.9 V/F

1

P16.0 P16.9

P16.7 120 × P16.5/P16.6 P16.9
120 × P16.5/P16.7
P16.2 P16.4


2

P16.12

1kHz			
5kHz			
10kHz			

3 V/F

P16.14 V/F P16.11=0
[0] V/F
[1] V/F P16.33 P16.45 V/F
[2]

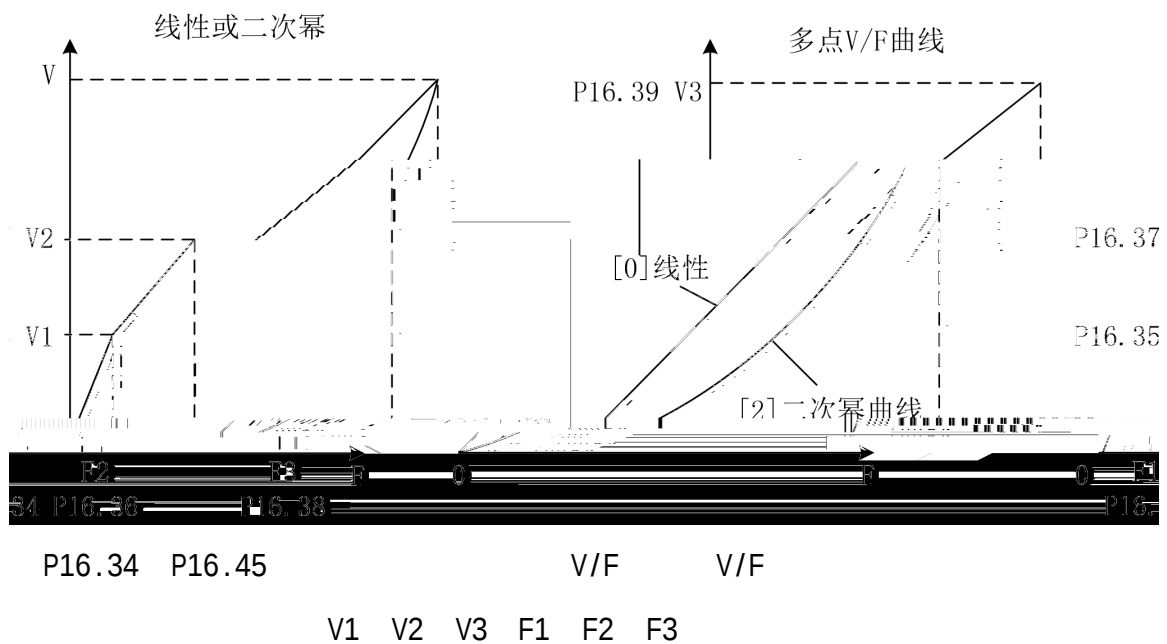

4


P16.15 V/F

V/F

5

P16.14=[0] V/F V/F P16.26 P16.26

P16.27

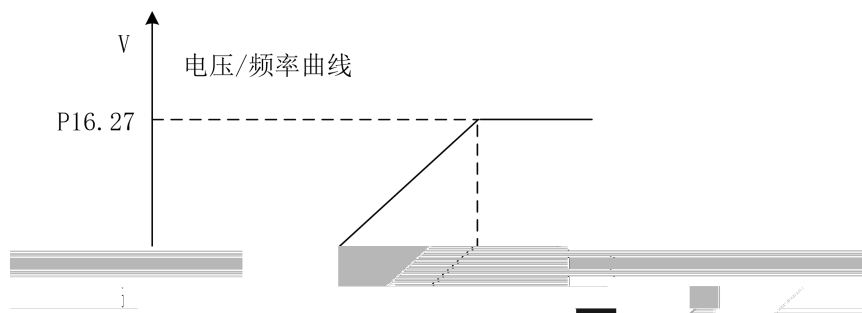

P16.14=[2] V/F P16.30 P16.30 P16.27


6

P16.50 P16.56

V/F

P16.50 P16.51 P16.52

P16.54 P16.55 P16.56

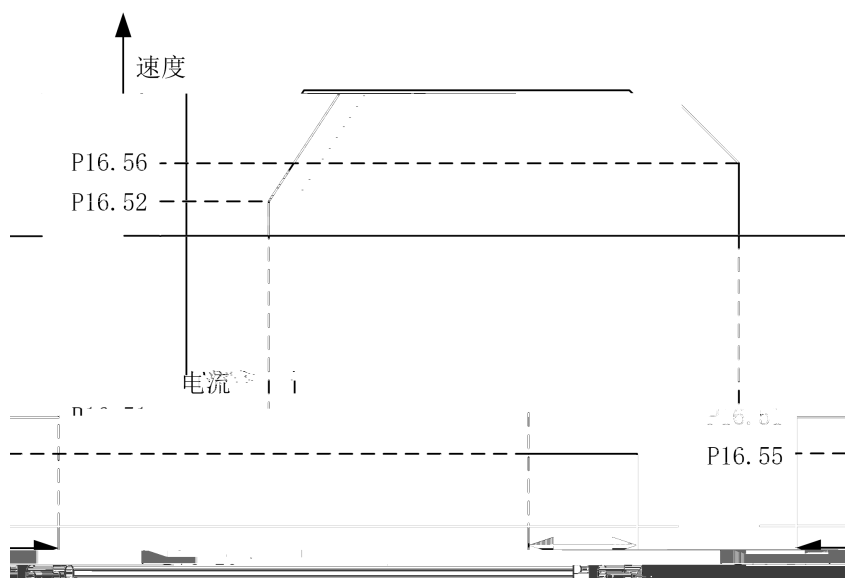

7

P16.64

8.10

1

P20.0

P20.0=0 P20.1=0 P20.2=0

P20.0=0 P20.1 ≠ 0 P20.2 ≠ 0

P20.0=1 P20.1 ≠ 0 P20.2 ≠ 0 1
0

P16.11 [1] [2]

P20.3 P20.1 [4]

2

P20.7

P20.8 P20.9 P20.7=1

3

P20.13

4

P20.15 A B


A B U V W

[0]

[1] A B


										GDHF-PGD1		PG
										GDHF-PGD1		PG
										DP		" CW0.9 "
										DI		" [10] "
										P20.26		P20.27
												0
										2%		
										P20.34		[0]
												1
										0		P20.26
												P20.27
												0
										P20.26		50%
												100%
										P20.27		3%
												5%
										P20.34		[1]
												2
										200		
										P20.26		P20.27
												0
										HF680NLC		P20.34
												[1]
										HF680NLC		P20.34
												[0]

P20.36

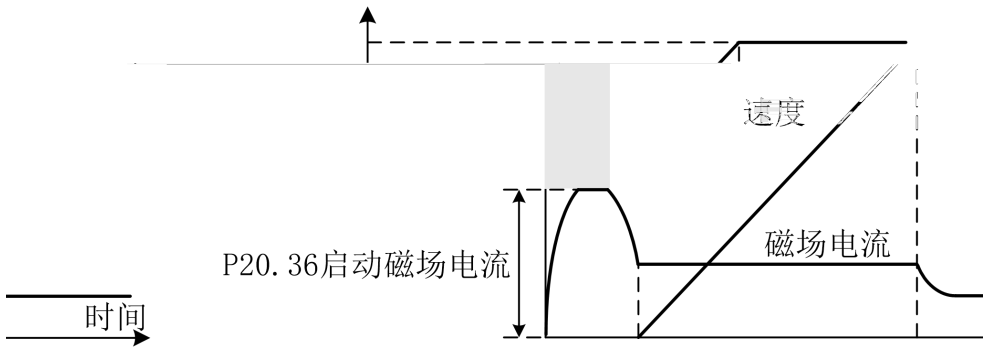

7

P20.37 P20.40

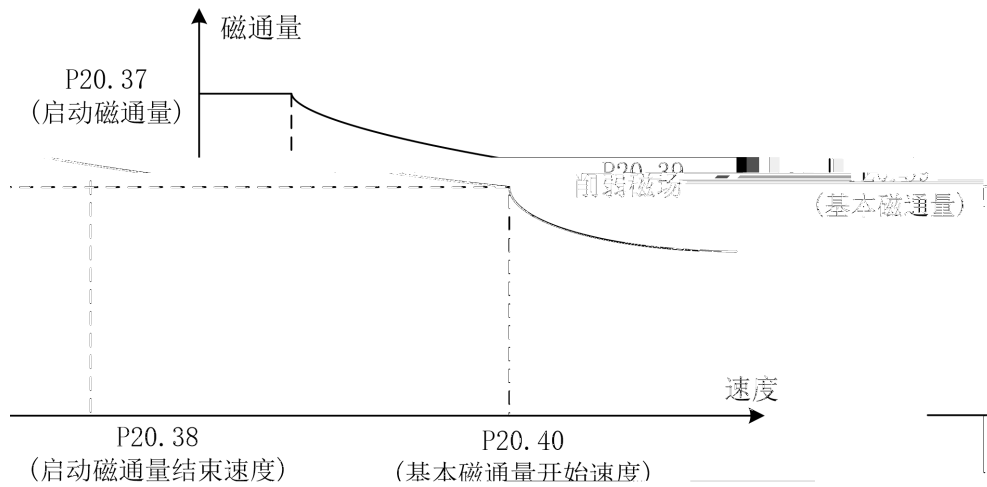

8

P20.57 P20.58 P20.59

P20.57 1

P20.58


P20.59

9

P20.55

P20.56

%

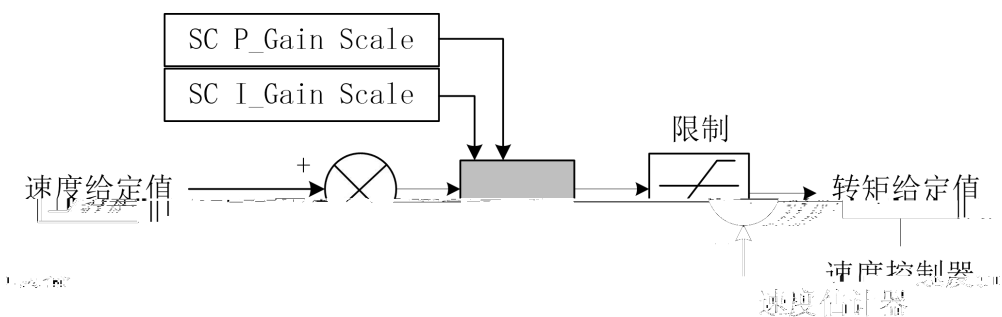


10 DROOP

		DROOP		DROOP
			P20.60	0
DROOP	P20.61	DROOP		

11

P20.62	P20.63		%
--------	--------	--	---

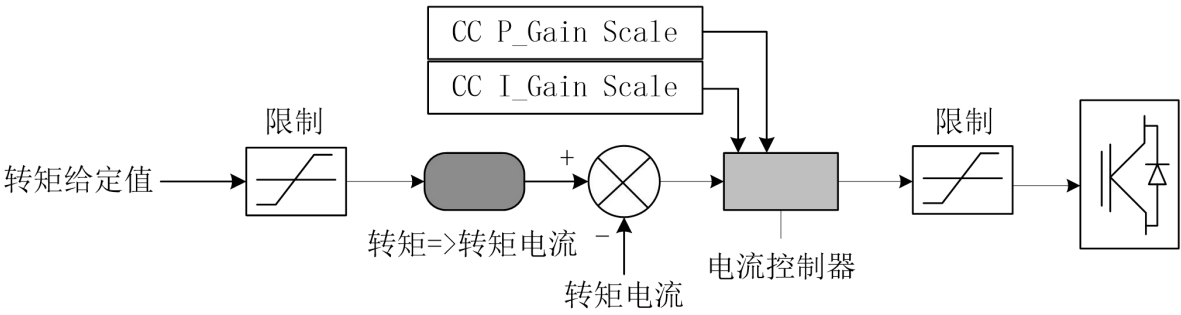

8.11

V/F	P16.64 V/F	(10 40Hz)	100	80 150	
	P16.12				
	P16.15				
	P16.26 V/F		0.75	0.5 1.2	
	P7.0		150	150 220	
	P16.12				
	P7.0		150	150 220	
	P20.43		75	50 100	
	P20.56		100	80 150	

9.

9.1

W01	SYS_NOT_RDY	(Ready)	
W02	NO_DRV_ENABLE	[]	P3
W03	LOCAL_EM	[]	P3
W04	REMOTE_EM	[]	P3
W06	OT	P7.14()	
W09	DP P/B ALARM	DP	DP
W10	MODBUS MODBUS ALARM	Modbus	Modbus
W15	PARAMETER ERROR		
W18	Temp_Sensing Fail		
W20	SLV_NOT_RDY		
W21	1 SLV1_CAN_ERR	1	1

9.2

[E050]	U ERR_UT not reset	IGBT IGBT
[E051]	U ERR_UT not reset	IGBT IGBT
[E052]	V ERR_UT not reset	IGBT IGBT
[E053]	V ERR_UT not reset	IGBT IGBT
[E054]	W ERR_UT not reset	IGBT IGBT
[E055]	W ERR_UT not reset	IGBT IGBT
[E056]	ERR_SLAVE_FAULT not reset	
[E057]	ERR_DB not reset	IGBT IGBT
[E100]	OV	P8.35(1) P7.12()
[E105]	UV	P7.13()
[E110]	OC	P7.4()

[E111]	OL	P7.49(1) P7.48(1) P7.48 P7.49
[E112]	ZC	P7.8
[E113]	MIP	
[E114]	MOP	
[E115]	OS	P7.19 P7.19
[E116]	SLVC Fail	P7.23
[E117]	MOTOR STALL	P20.15 P20.14
[E118]	PG ERROR	P20.14 P20.15
[E119]	SPEED ABNORMAL	P20.14 P20.15 P7.31 P7.32
[E121]	IGBT1 OT1	
[E122]	IGBT2 OT2	
[E123]	IGBT3 OT3	
[E124]	IGBT4 OT4	
[E125]	IGBT5 OT5	
[E126]	IGBT6 OT6	

[E127]	IGBT7 OT7	
[E128]	IGBT8 OT8	
[E137]	FAN STALL	
[E138]	TEMP_SENSING FAIL	
[E152]	U IGBT PDP [UB]	IGBT IGBT
[E154]	V IGBT PDP[VB]	IGBT IGBT
[E155]	W IGBT PDP [WT]	IGBT IGBT
[E156]	Hardware OC	
[E157]	PDP [DB]	
[E160]	SLAVE FAULT	
[E161]	SLV_NOT_RDY	
[E162]	1 CAN SLV1_CAN_ERR	1
[E167]	CAN CAN_ERR	
[E170]	MOTOR TUNING FAIL	P7.33
[E180]	DP P/B ERROR	
[E181]	DP P/B_EM	CW0.4
[E200]	LOCAL_EM	[] P3

[E201]	REMOTE_EM	[] P3
[E202]	Modbus MODBUS EMERGENCY	Modbus CWO.4
[E203]	DRIVE DISABLED	DP
[E210]	Panel Error	
[E220]	CRC MEMORY CRC ERR	
[E221]	PARAMETER ERROR	

9.3

		• ON COM	• ON COM
		•	•
		•	•
		•	•
		•	•
		•	•
		•	•
		•	•
		•	•
		•	•
		•	•
		• ON	• ON

10.

1.
2.
3.
4.

1.	CMOS
2.	
3.	

10.1

q

10.3

	2	1 2
PCB		

10.4

5

5

(400-0077-570)

1 40

2 80%

3 24 /

10.5

1

GUIDE

1
2
3

Wuhan Guide Technology Co.,Ltd.

6

430223

86-027-87927230

shfw@gdetec.com

www.gdetec.com

400-0077-570

L